

**SPECIFICATIONS**

**Electrical:**

- 1.Current Rating: 1.5A / contact terminal
- 2.Voltage Rating: 30V DC
- 3.Contact Resistance: 30 milliohms Max
- 4.Dielectric Withstanding Voltage: 500 V AC AT Sec Level
- 5.Insulation Resistance: 1,000 MEGA ohms Min

**Mechanical:**

- 1.Connector Mate and Unmate Force  
Mate force: 3.57 kgf (Max)  
Unmate force: 1.02 kgf (Min)
- 2.Terminal Retention: 1.2 kgf (Min)

**Material:**


- 1.Housing:  
High Temperature Thermal Plastics,  
UL 94V-0 , PBT , White/Black
- 2.Contact: BRASS
- 3.Shell: BRASS/SPCC

**Finish:**

- 1.Contact: Plated Gold in Mating Area;  
Tin on Solder Balls
- 2.Shell: Nickel Plating

**RoHS Compliant**

TOLERANCES ARE

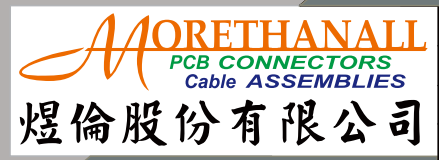

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE  
SIZE A4

Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

照片框

**ORDER INFORMATION**

USB-SR106xx-4A-LF  
SERIES | LEADFREE  
4 PIN A TYPE  
BK:BLACK  
WH:WHITE  
LONG 10.6mm  
DIP 90°

DESCRIPTION: USB AF 短體90度 魚叉腳

www.morethanall.com

PPOJECTION