



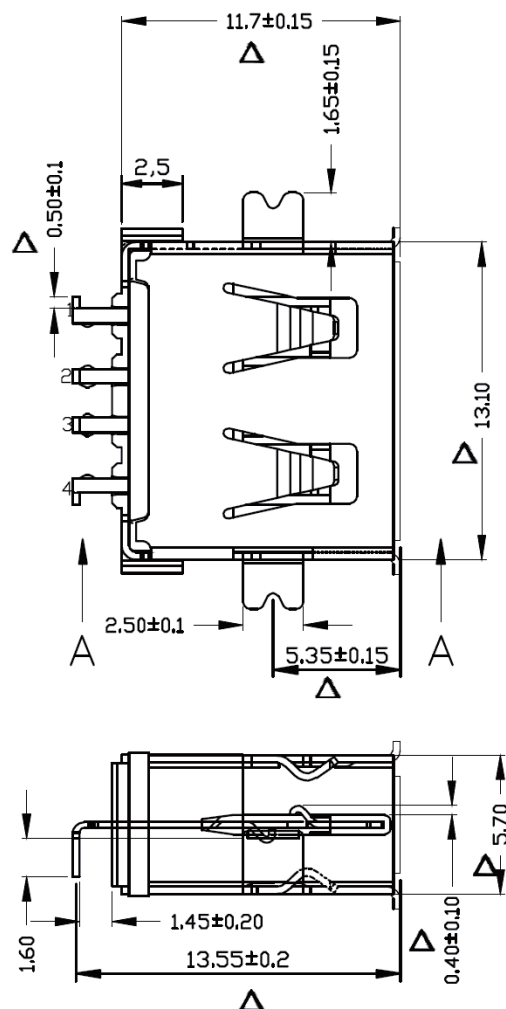

SECTION A-A

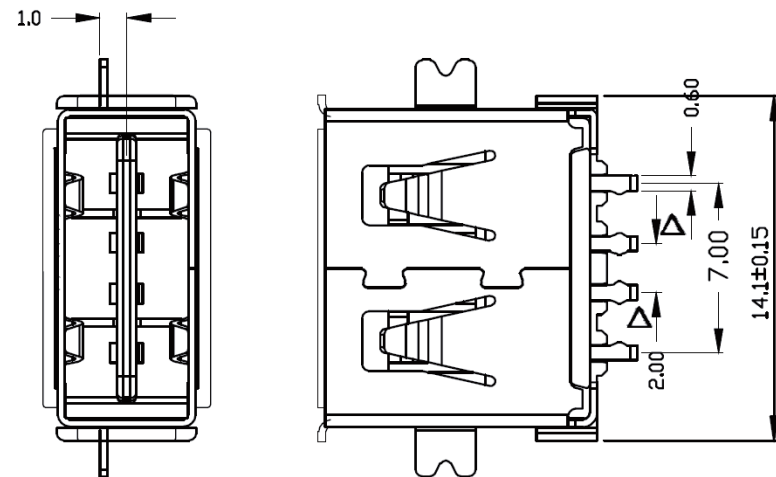

备注:


1、材质: 胶料, LCP灰色或PA9T黑色, UL94V-0
端子: 磷铜, 接触区域镀金3u"min.
镀镍底50u"min, 镀锡80u"min.
铁壳: SPCC镀镍80u"min.

2、机械性能:

接触阻抗: 30mΩ max.
插拔力: 0.6KG-1.5KG.
寿命次数: 3000次min.
绝缘阻抗: 1000MΩ min.
耐压测试: 500V AC 1分钟

3、环境性能: 盐雾测试: 24小时.

4、标示 "Δ" 为重点检验尺寸.

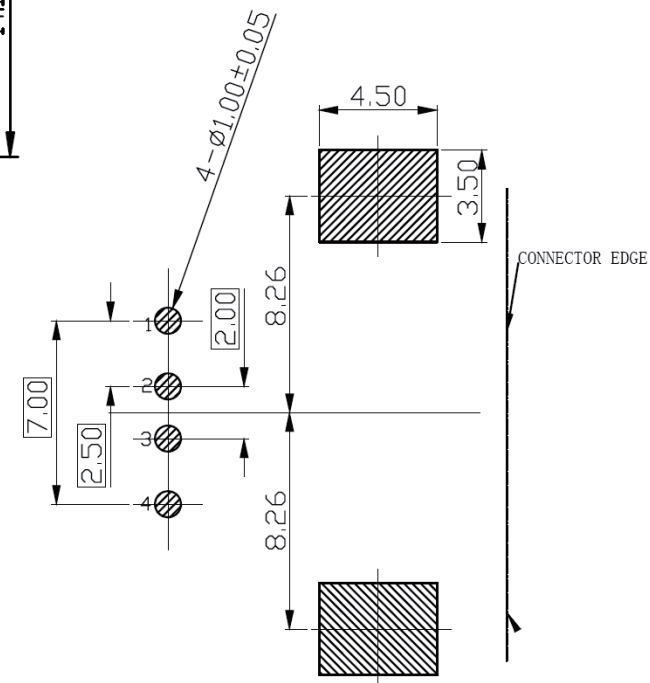

PC BOARD LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.25

.XX ± 0.20

.XXX ± 0.15

ANG ± 5°

PPOJECTION

α T 2

ORDER INFORMATION

USB-SRBK-4C1-LF

SERIES

LEADFREE

4 PIN BOTH-SIDE CONTACT

BLACK

DIP 90°

FEMALE

DESCRIPTION: