

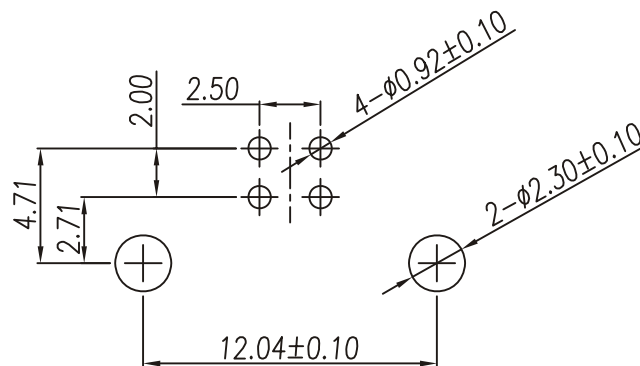
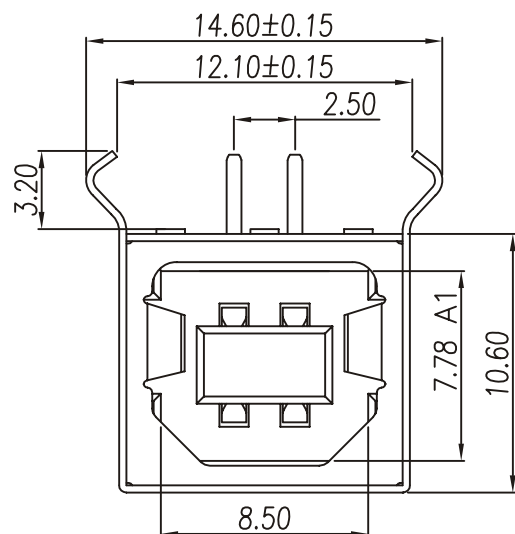


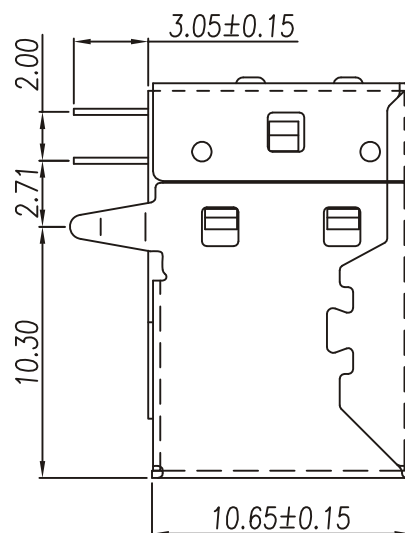

RECOMMENDED P.C.B. PATTERN LAYOUT

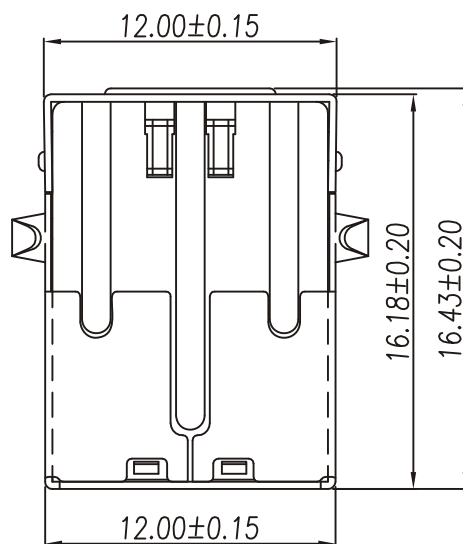

Note:

1.MECHANICAL:

MATING: 35N MAX.

WITHDRAWAL: 10N MIN.

DURABILITY: 1500 CYCLES MIN.

2.ELECTRICAL:

CURRENT: 1.5A MAX

VOLTAGE: 30V MAX

WITHSTANDING VOLTAGE: 500V AC

CONTACT RESISTANCE: 30 mΩ MAX

INSULATION RESISTANCE: 1000MΩ MIN

3.ENVIRONMENTAL

TEMPERATURE RANGE -55°C ~ +85°C

Table:

PART NAME	Q'TY	Material
FRONT SHELL	1	SPCC,NI PLATING 80U" MIN
BACK SHELL	1	SPCC,NI PLATING 80U" MIN
LONG CONTACT	2	C5191-EH,GOLD FLASH
SHORT CONTACT	2	C5191-EH,GOLD FLASH
HOUSING	1	PBT+30%GF,UL94V-0,BLACK
LONG CONTACT	2	C5191-EH,GOLD 30U"
SHORT CONTACT	2	C5191-EH,GOLD 30U"
LONG CONTACT	2	C5191-EH,GOLD 15U"
SHORT CONTACT	2	C5191-EH,GOLD 15U"
LONG CONTACT	2	C5191-EH,GOLD 5U"
SHORT CONTACT	2	C5191-EH,GOLD 5U"
HOUSING	1	PBT+30%GF,UL94V-0,WHITE
LONG CONTACT	2	C5191-EH,GOLD 30U"
SHORT CONTACT	2	C5191-EH,GOLD 30U"
HOUSING	1	PBT+30%GF,UL94V-0,WHITE
LONG CONTACT	2	C5191-EH,GOLD 15U"
SHORT CONTACT	2	C5191-EH,GOLD 15U"
HOUSING	1	PBT+30%GF,UL94V-0,WHITE
HOUSING	1	PBT+30%GF,UL94V-0,BLUE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-SRBKS30-4B-LF

SERIES
LEADFREE
4 PIN B TYPE
SEMI GOLD 30u"
BLACK
DIP 90°
FEMALE

DESCRIPTION: USB BF 90°DIP WITH COVER(ZT)