



Bottom View

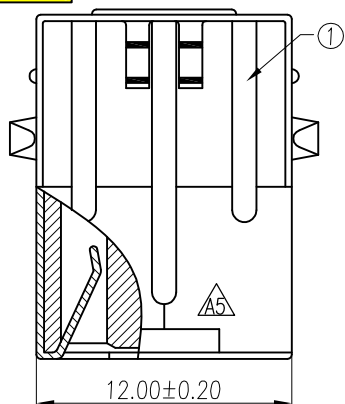

Side View


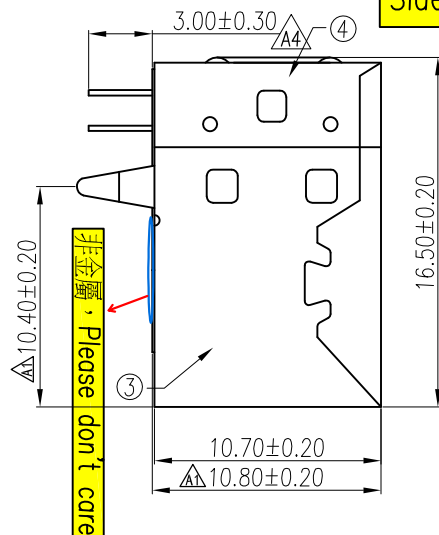


Note:

Specification:

1. Rated voltage and current: 1.5A at 250V AC minimum.x.
2. Dielectric withstanding voltage: 500V AC/1 minute without breakdown.
3. Contact resistance: Before life test 30m ohm Max.
After life test 50m ohm max
4. Insulation resistance: 1000M ohm Min at DC 500V.
5. Insertion force: 35 Newtons Max.
6. Extraction force: 10 Newtons Min.
7. Solderability: Terminal shall be immersed in flux before test, Then dip in molten solder for 5 ± 0.5 sec. At $245 \pm 5^\circ\text{C}$
8. Temperature range: $-55^\circ\text{C} \sim +85^\circ\text{C}$
9. Durability: 1500 cycles

Front View

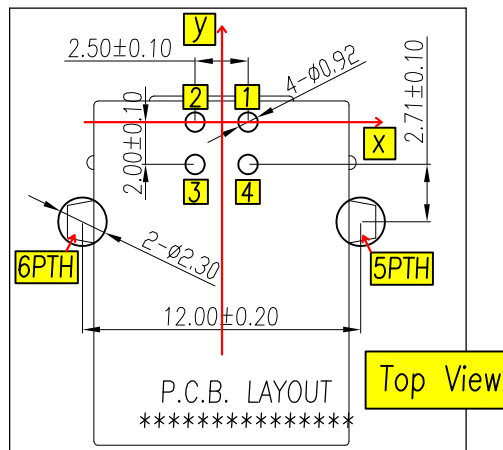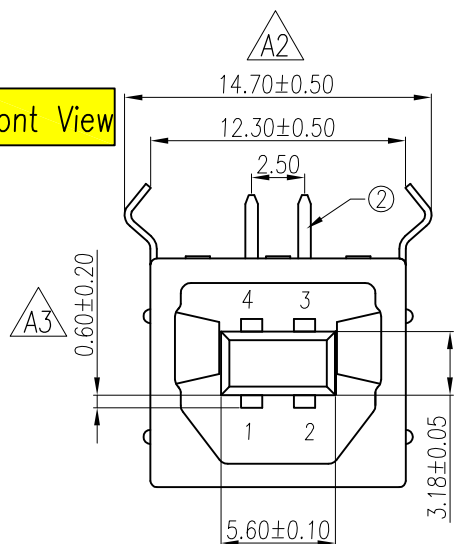

4	Back-shell	1	Steel	T=0.30mm	Cu:40u"min. 80u"min. Nickel Plated
3	Shell	1	Steel	T=0.30mm	Cu:40u"min. 80u"min. Nickel Plated
2	Contact	4	Brass	T=0.25mm	Contact area: 3u"min. Gold Platedover 40u"Nickel min. Solder area:80u"min. matte Tin Plated over 40u" Nickel min.
1	Housing	1	P.B.T	UL 94-V0	Black/White
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PPOJECTION

X. $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 1°

照片框

ORDER INFORMATION

USB-SRWHS03-4B-LF

SERIES

LEADFREE

4 PIN B TYPE

SEMI GOLD 3u"

WHITE

DIP 90°

FEMALE

DESCRIPTION: USB-B(F) 90° DIP(錫腳長3.0)外殼鐵料