
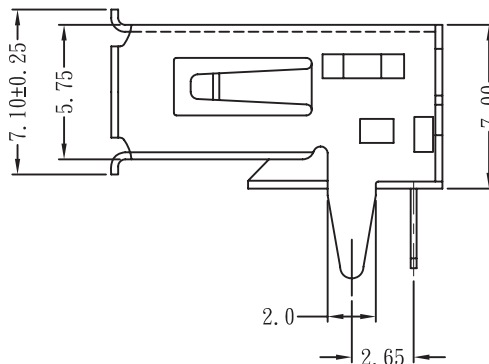
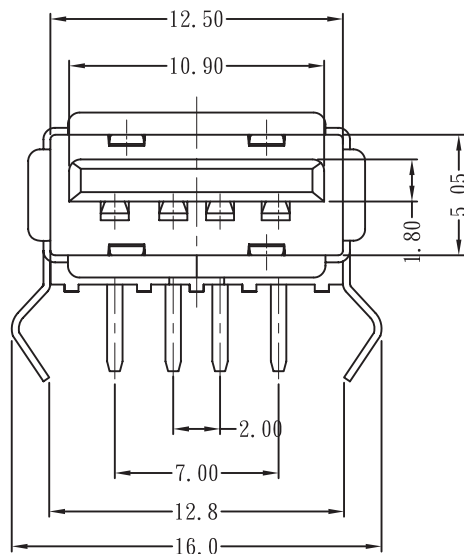
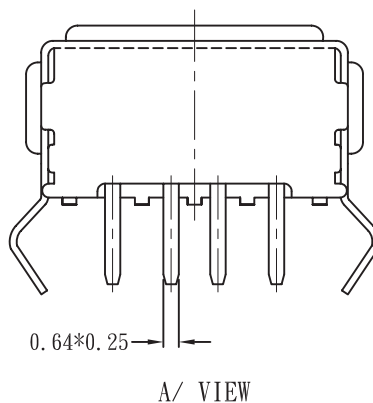


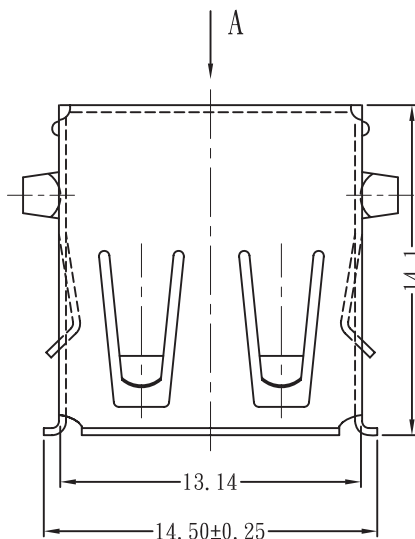

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.25mm
- 1.3 Shell: Spcc,t=0.30mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 m WMax.
- 2.4 Insulation resistance: 1000 M WMin.
- 2.5 Total mating force: 4.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.


Environmental Temperature:-40deg to + 85deg C

Working Temperature:-40deg to + 85deg C

Resistance (Connection pins) to Solder heat:230deg C (3~5 sec.)

Resistance (Housing Material) to Solder heat:230deg C (3~5 sec.)

S30:min.1.27um Ni all over;min.0.76um Au in the contact area of 4mm;min.0.1um Au on the rest of mating area (2mm);

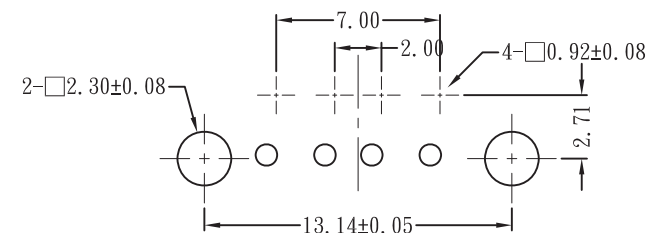

Recommended P.C. Board
Hole Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SRWHSxxN9T-4A-LF
SERIES | LEADFREE
FEMALE | 4 PIN A TYPE
DIP 90° | NYLON 9T
WHITE | S03:SEMI-GOLD 3u"
S30:SEMI-GOLD 30u"

DESCRIPTION: USB A TYPE 板端 90° (CUSTOMER DRAWING)