
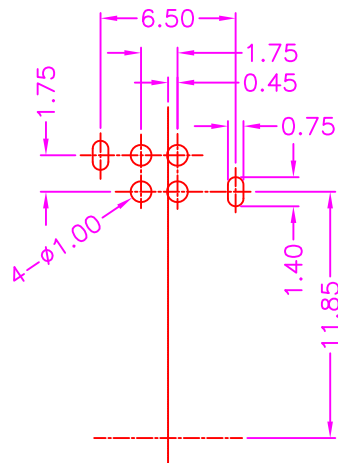
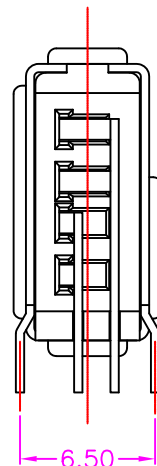
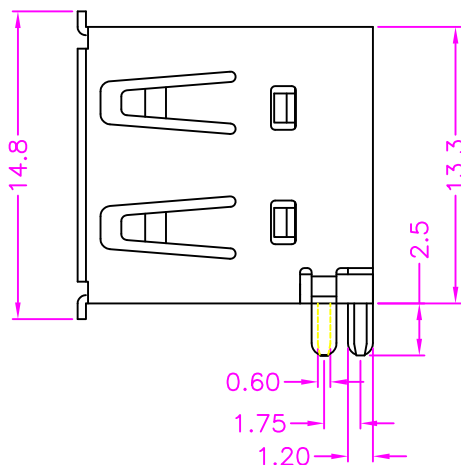
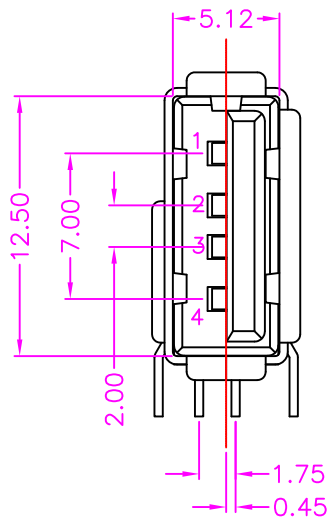
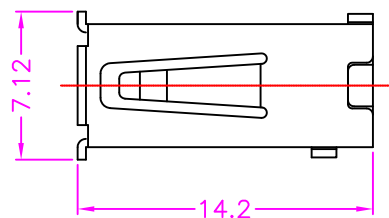




P.C.B. LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: PBT (UL 94V-0)

SHELL: COPPER ALLOY, NICKEL PLATING

TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE

CONTACT RESISTANCE: 30m OHMS MAX

INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V

OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

.XXX ± 0.10

DATE

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-SU2M1xx-4A-LF

SERIES | | | | LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
METAL FOOT
2 ROW PIN

DESCRIPTION: USB A TYPE, PCB MOUNT, UPRIGHT REVERSE TYPE, METAL SHIELD, FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com