
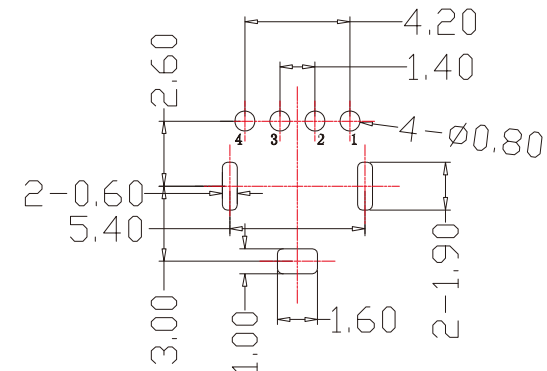
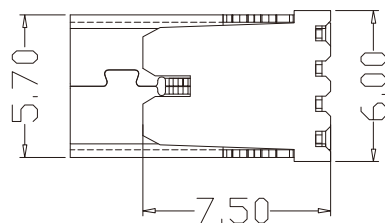


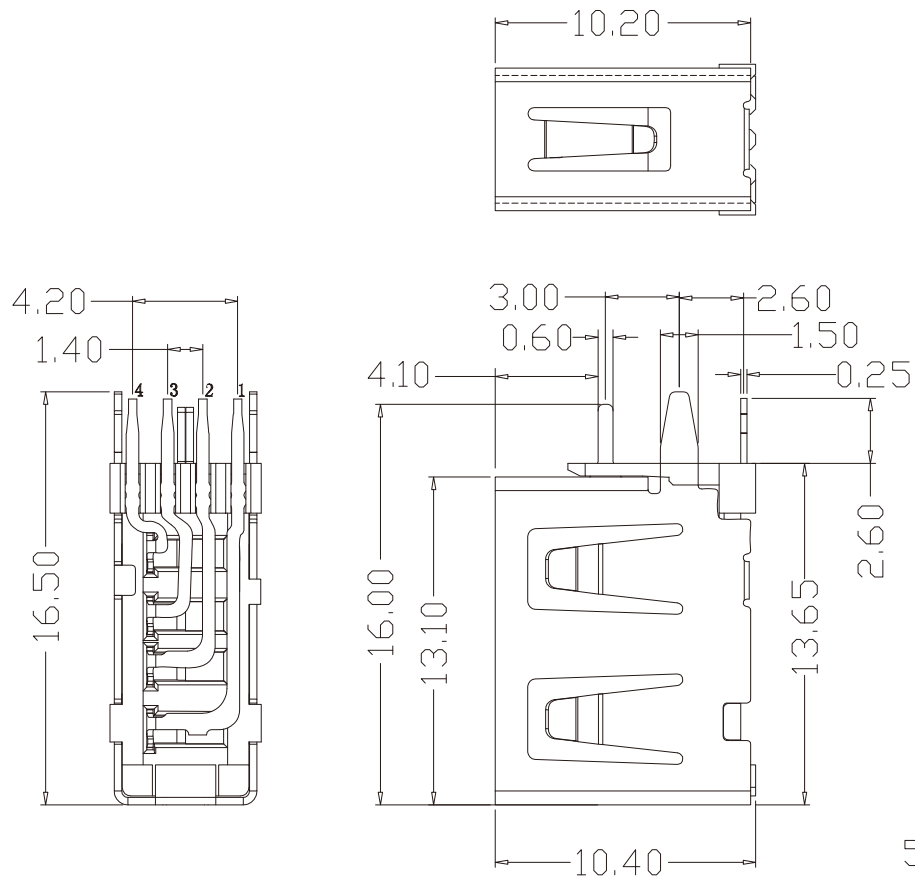

PCB LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Rated Voltage: 500V AC / DC
- 2.Rated Current: 2.0 A Max
- 3.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 4.Insulation Resistance: 1,000 MΩ Min
- 5.Contact Resistance: 30 mΩ Max

Material:

- 1.Housing: Thermoplastics, UL94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

ORDER INFORMATION

USB-SU4cc104-4A-LF
SERIES T LEADFREE
FEMALE BK:BLACK LONG 10.4mm
UPRIGHT WH:WHITE
4X01

DESCRIPTION: USB A/F 短體內直腳,無捲邊 ,L:10.4mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com