

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触电阻: Contact Resistance
30 milliohms MAX
- 4.耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

- 1.插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)

- 2.端子保持力: Terminal Retention
1.0kgf(MIN)

- 1.塑胶: Housing:
Hing Temperature Thermoplastics,






- 2.端子: Contact: Copper Alloy C2680
- 3.外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1.端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U”(MIN)锡, 镀金区域镀100—200U”镀金1U”

- 2.外壳: Shell:
SUS四周镀80U”(MIN)锡
Nickel Plating

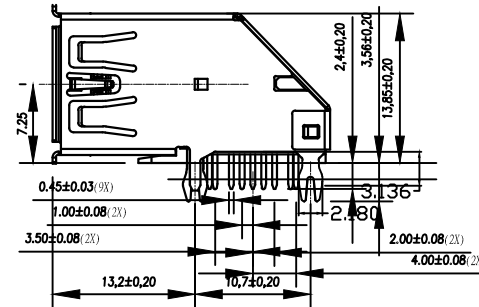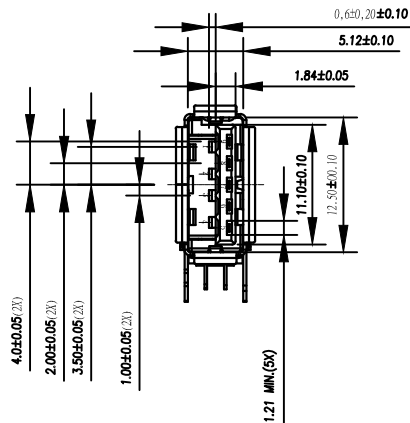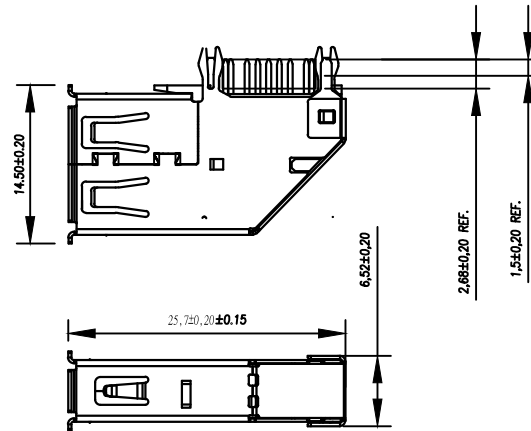

RECOMMENDED PCB LAYOUT

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	SSRX-
6	SSRX+
7	GND
8	SSTX-
9	SSTX+
Shell	Shield

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

USB-SUBL-9A-LF
SERIES LEADFREE
BLUE 9 PIN A TYPE
UPRIGHT
FEMALE

DESCRIPTION: