
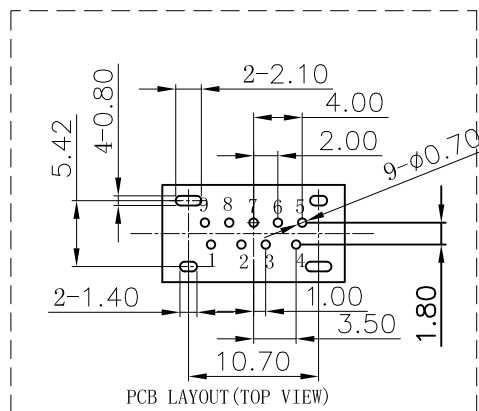
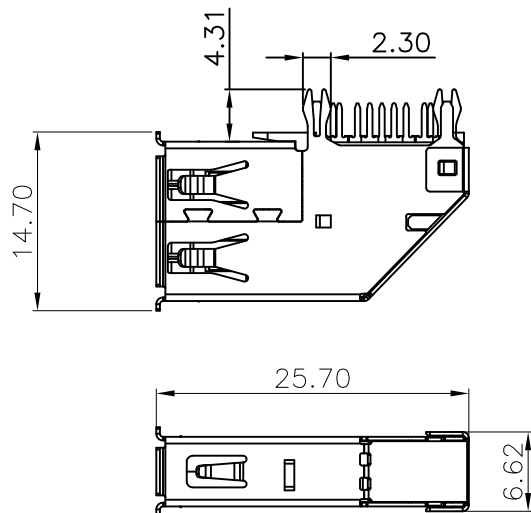


SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4.
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩ Max for other contacts
 Mechanical Characteristics:
 Mating Force:3.5 Newtons.Maximum
 Unmating Force:10 Newtons.Minimum.
 operating Temperature:-55°to+85°

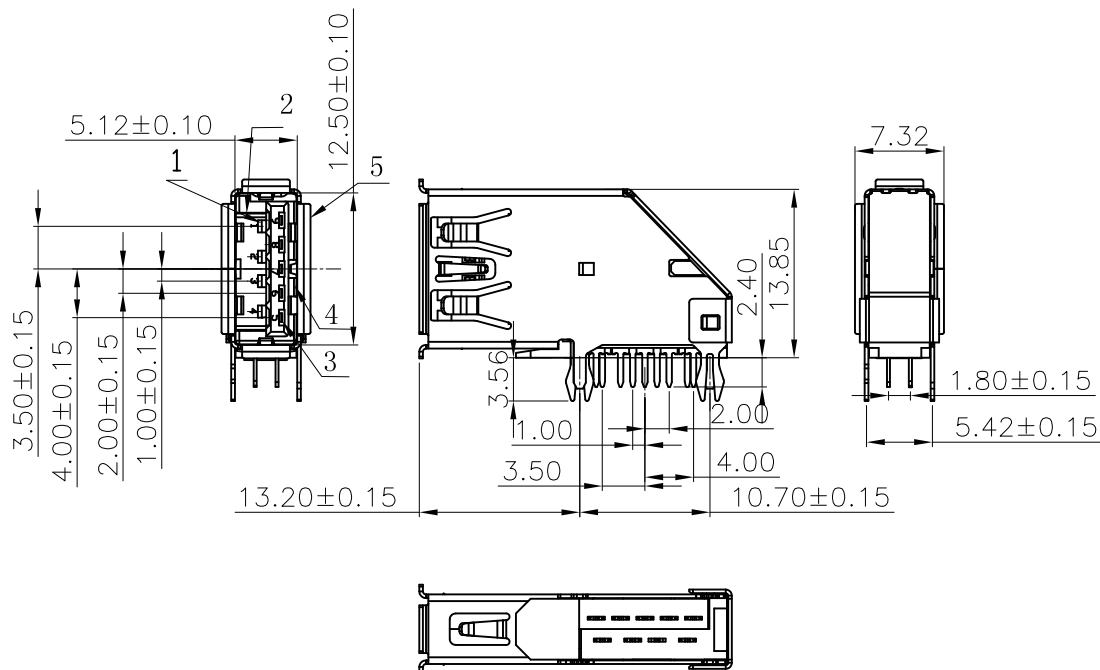

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSRX-
2	D-	6	SSRX+
3	D+	7	GND
4	GND	8	SSTX-
Shell	Shield	9	SSRT+

ITEM	PART NAME	Material	Q'TY	REMARK
1	4P Semi-manufactured Goods	Housing PBT	1	Black &Blue UL94V-0
2		Contact C5191-H	4	T=0.25 Plating Gild/Tin
3	5P Semi-manufactured Goods	Housing PBT	1	Black &Blue UL94V-0
4		Contact C2680-H	5	T=0.25 Plating Gild/Tin
5	Shell	SUS304-1/2H	1	T=0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.35
 .XX ± 0.25
 .XXX ±
 ANG ± 2°

照片框

ORDER INFORMATION

USB-SUxx-9A-LF
 SERIES LEADFREE
 9 PIN A TYPE
 BK:BLACK
 BL:BLUE
 UPRIGHT
 FEMALE

DESCRIPTION: USB AF 3.0 側向90度