
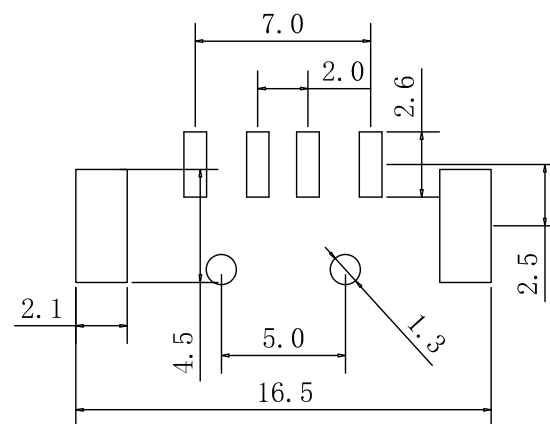
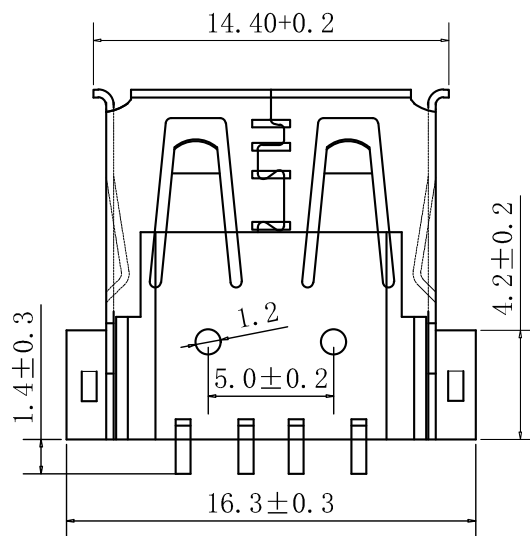
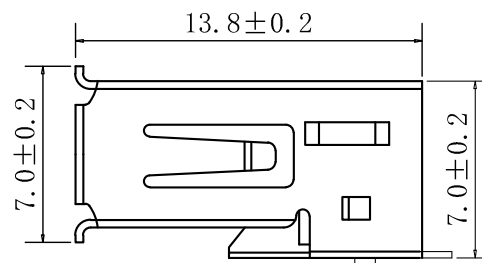


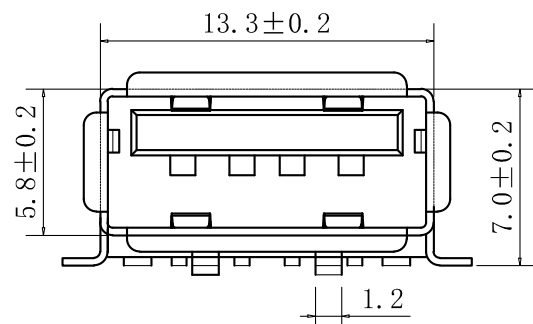

PCB LAYOUT

特性: Specifications:

电气: Electrical:

1. 接触阻抗: Contact Resistance:
30 milliohms MAX
2. 耐电压: Dielectric With Standing Voltage:
500 V AC AT Sea Level
3. 绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MIN

机构: Mechanical:

1. 结合力: Mating Force:
35 N MAX 最大 35 N
2. 拔出力: Unmating Force:
10 N MIN 最少 10 N

材料: Material:

1. 塑胶: LCP.
2. 端子: Contact: C2680
3. 外壳: Shell: SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area:
Tin/Lead On Solder Tails. 接触点镀金, 脚镀锡
2. 外壳: Shell:
Nickel Plating . 镀镍

额定电流1.5A, 盐雾24H, 镀锡部分12H

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PROJECTION

照片框

ORDER INFORMATION

USB-SWEPBK-4A-LF
SERIES
FEMALE
LEADFREE
4 PIN A TYPE
BLACK
POST
EAR
90°SMT

DESCRIPTION: USB AF 方脚 SMT 有柱 黑膠