
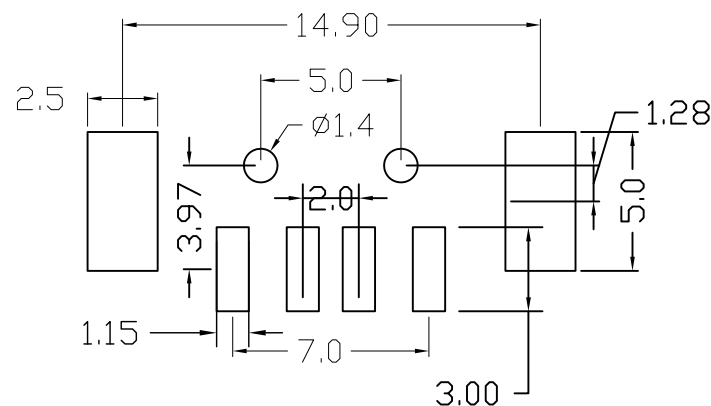
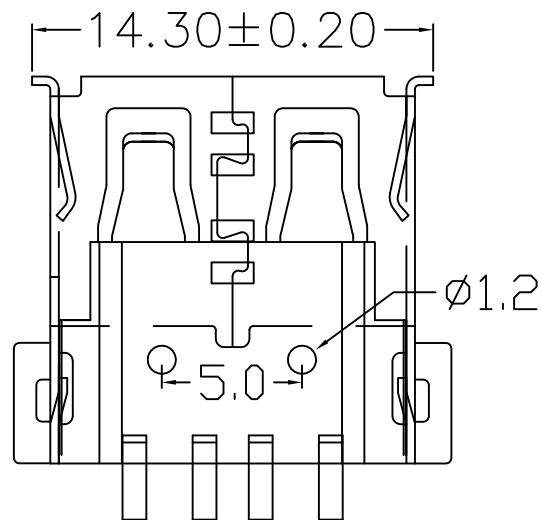
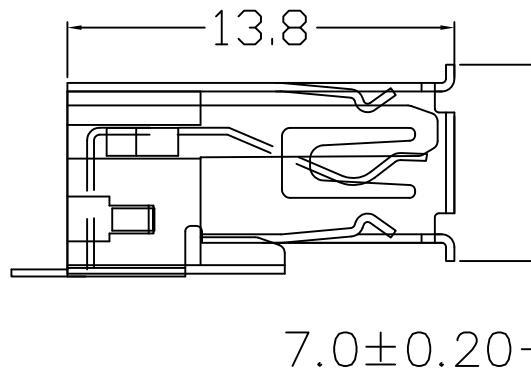


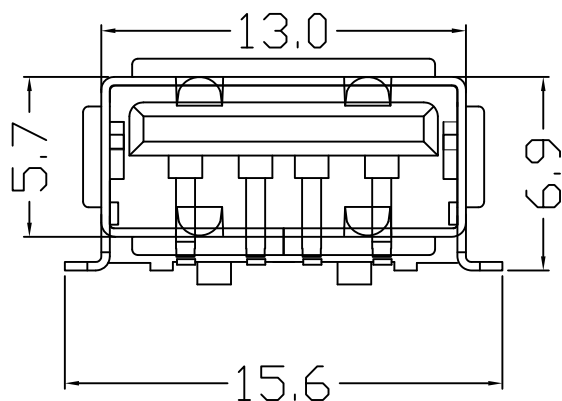

规格说明: Specifications:

电气特性: Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触电阻: Contact Resistance
30 milliohms MAX
- 4.耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5.绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 1.插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 2.端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

- 1.塑胶: Housing:
Hing Temperature Tnermaplastics,
- 2.端子: Contact: Copper Alloy C2680
- 3.外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1.端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”

- 2.外壳: Shell:
铜壳四周镀80U”(MIN)镍
Nickel Plating

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

照片框

ORDER INFORMATION

USB-SWEPWH-4A-LF
SERIES | | | | LEADFREE
4 PIN A TYPE
FEMALE | | | | POST
EAR | | | | 90°SMT

DESCRIPTION: USB-AF-全贴1.2柱子有边