


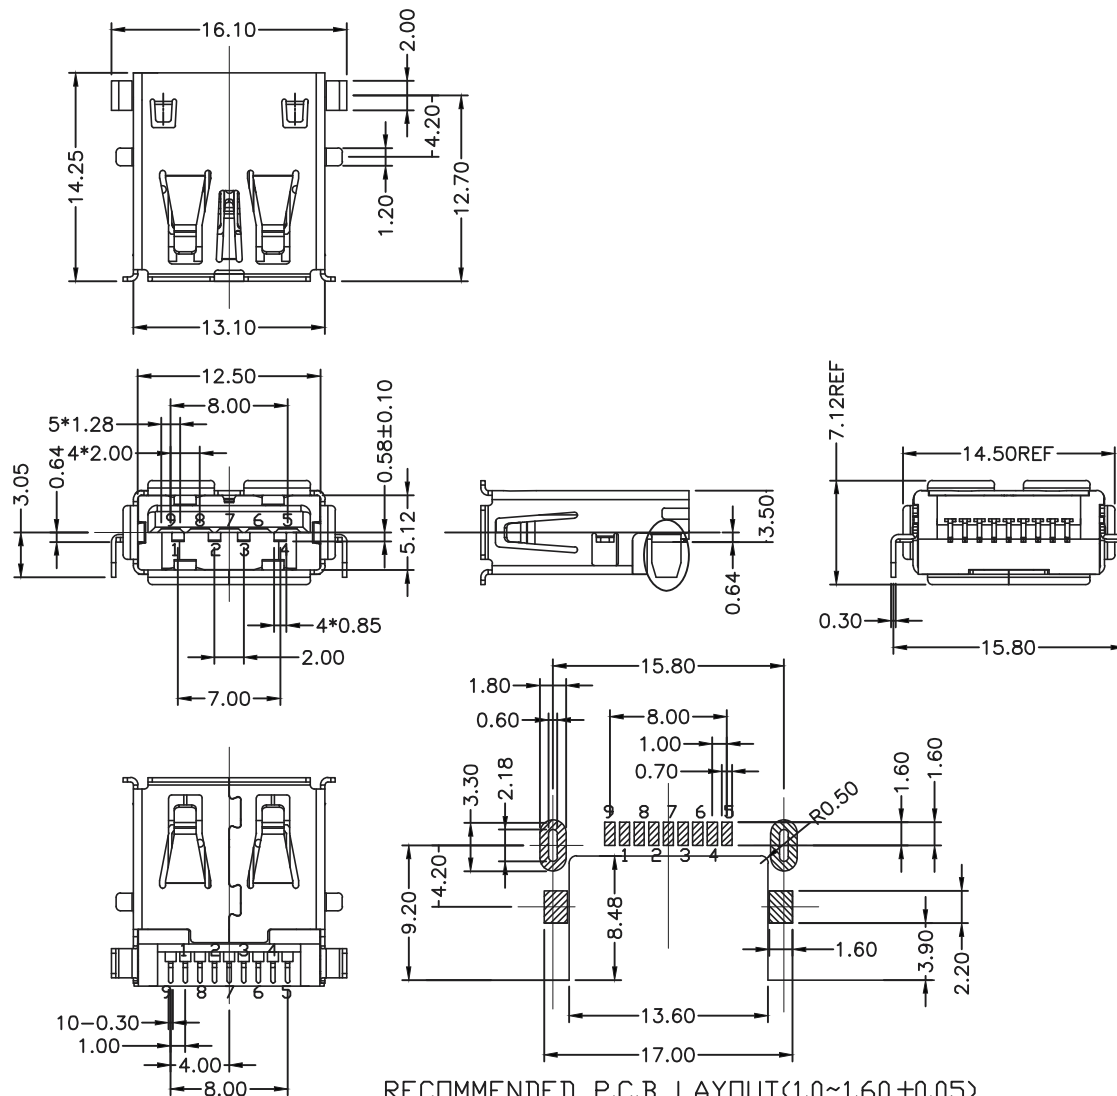

RECOMMENDED P.C.B LAYOUT(1.0~1.60±0.05)

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0),
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5A MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~85°C

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
1	VBUS	6	StdA_SSRX+
2	D-	7	GND_DRAIN
3	D+	8	StdA_SSTX-
4	GND	9	StdA_SSTX+
5	StdA_SSRX-	Shell	Shield

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-SWFEMBL-9A-LF
SERIES
FEMALE
90°SMT
LEADFREE
9 PIN A TYPE
BLUE
METAL FOOT
EAR
OFFSET

DESCRIPTION:USB 3.0 A TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE CUT BOARD 2.40