

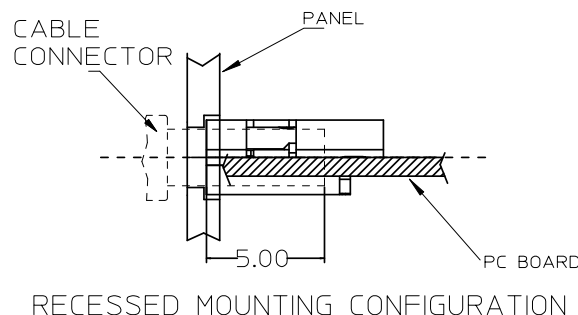
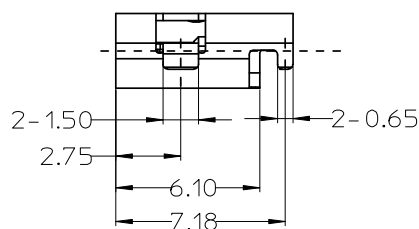
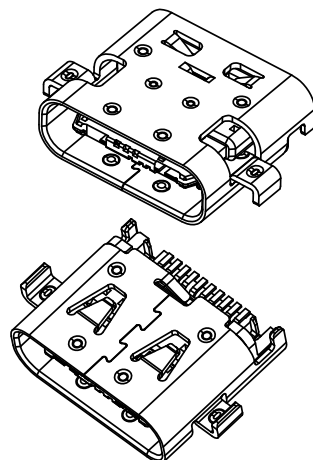

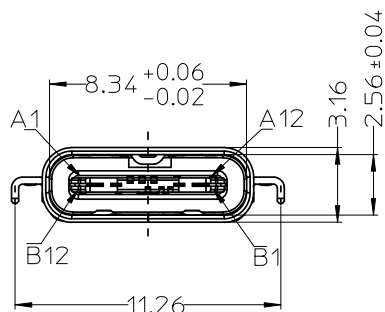




PIN ASSIGNMENT:

Pin No.	Signal Name	Pin No.	Signal Name
A1		B12	GND
A2		B11	
A3		B10	
A4		B9	VBUS
A5	CC1	B8	
A6	D+	B7	D-
A7	D-	B6	D+
A8		B5	CC2
A9	VBUS	B4	
A10		B3	
A11		B2	
A12	GND	B1	

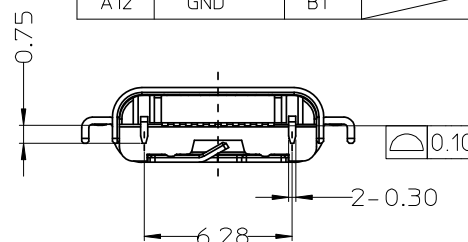

NOTES:

1:MATERIAL:


SHIELDING PLATE:THERMOPLASTIC UL94V-0,COLOR:BLACK
 INNER I/M:THERMOPLASTIC UL94V-0,COLOR:BLACK.
 LOWER CONTACT:COPPER ALLOY.
 UPPER CONTACT:COPPER ALLOY.
 OUTER SHELL: STAINLESS STEEL.

2:PLATING:

TERMINAL:GOLD FLASH OVER ALL.
 NICKEL UNDERPLATED OVER ALL.
 OUTER SHELL:NICKEL PLATED OVER ALL.
 GOLD FLASH ON THE SOLDER TAIL AREA.

3:PRODUCT SPECIFICATION:N/A

4:PACKAGE SPECIFICATION:N/A

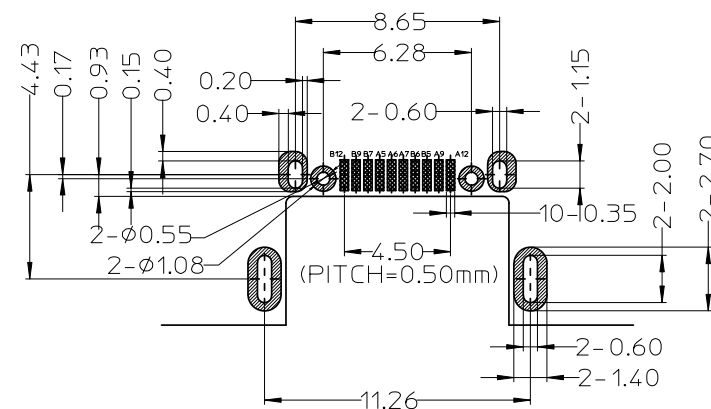

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)

PCB THICKNESS: 0.80±0.05[.031±.002]mm
 DEFAULT TOLERANCE: ±0.05[.002]

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

USB-SWFMMMS-24C10-LF
 SERIES | LEADFREE
 FEMALE | 10 WAY
 90°SMT | 24PIN C TYPE
 SPRING
 METAL FOOT
 OFFSET

DESCRIPTION: USB TYPEC FOR USB2.0 CONNECTOR
 0.50MM PITCH, 10 CIRCUITS MID-MOUNT,SMT TYPE