




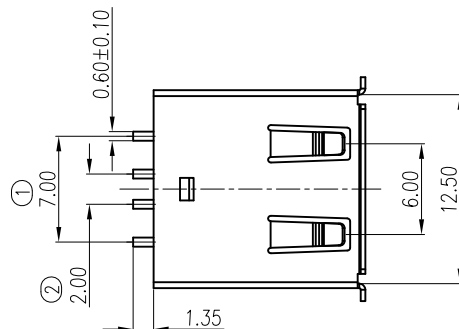


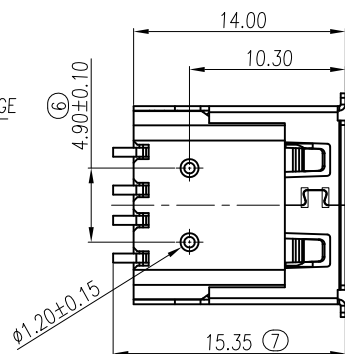

Note:

Specification:

1. Current rating: 1.5 A Max.
2. Dielectric withstanding voltage: 30V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Insertion force: 35 Newtons Max.
6. Extraction force: 10 Newtons Min.
7. Solderability: Terminal shall be immersed in flux before text, Then dip in molten solder for 5±0.5 sec. At 260±5°C
8. Temperature range: -55°C~+85°C

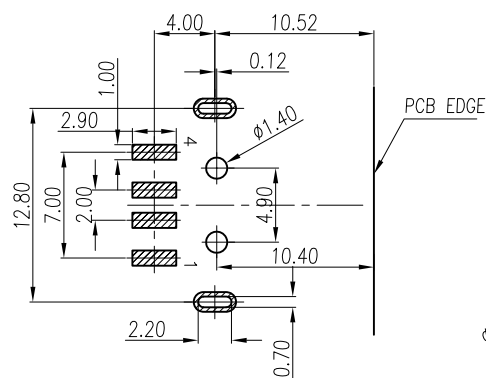

PCB LAYOUT

3	Shell	1	Steel	T=0.30mm	80u"min Nickel Plated
2	Contact	4	Copper alloy	T=0.25mm	Contact area:0.8~30u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	Hi-temp thermoplastic	UL 94-V0	Natural
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

USB-SWMP1WHR-4A-LF
SERIES
FEMALE
90°SMT
LEADFREE
4 PIN A TYPE
REEL
WHITE
POST
METAL FOOT

DESCRIPTION: USB-A(F)SMT 有腳式(外殼直腳式)

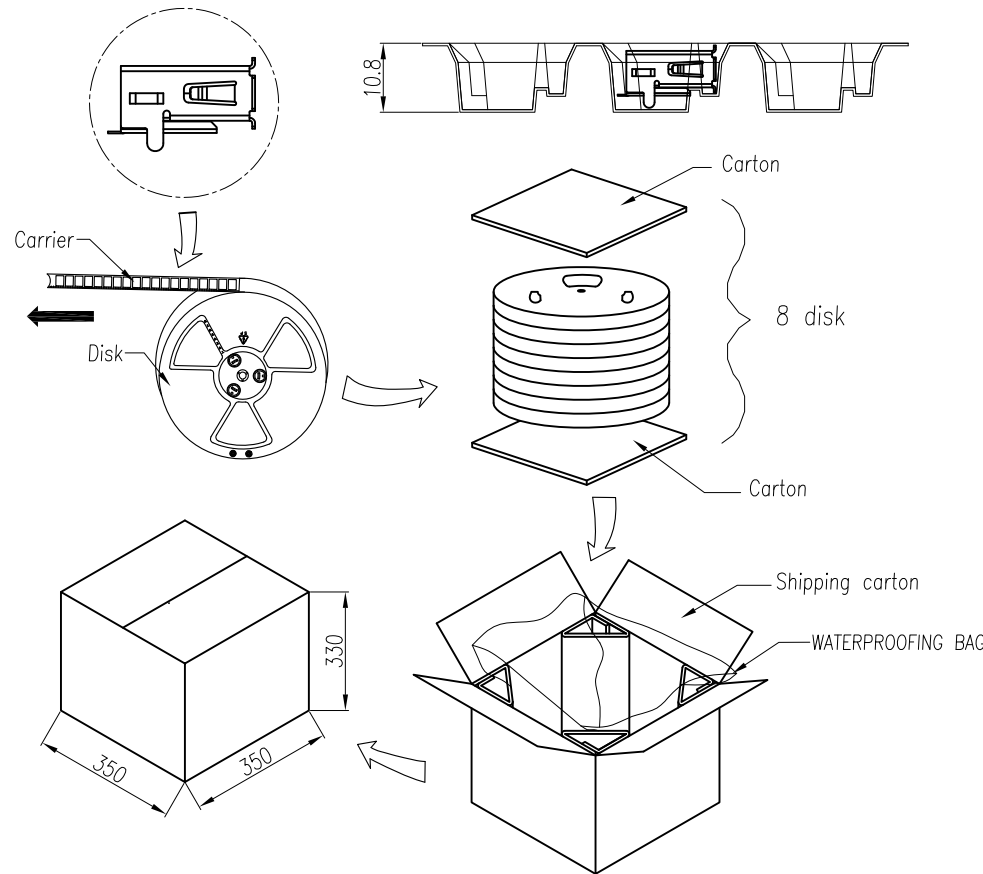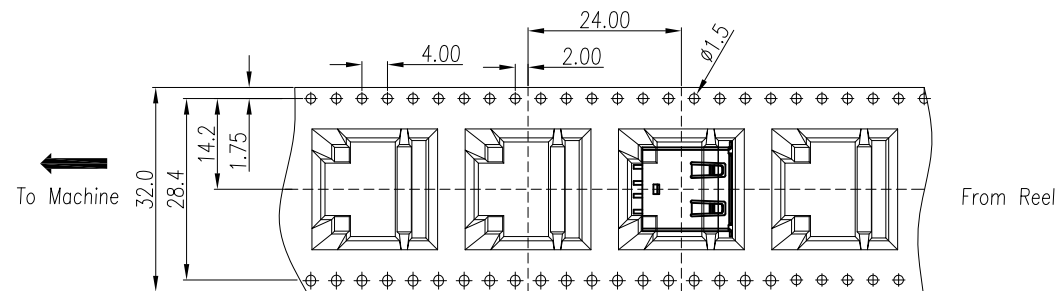

NOTES:

1.Material:


- 1.1 Carrier:Black Anti-Static Polystyrene.
- 1.2 Shipping carton:corrugated fiberboard
- 1.3 Waterproofing bag:PE

2.Dimension:

- 2.1 Carrier: Thickness:0.5±0.05mm.
- 2.2 Disk: Diameter Ø330mm.

3.Quantity:

- 3.1 Primary packing:250 PCS/Disk.
- 3.2 Secondary packing:8 Disk(2000PCS).

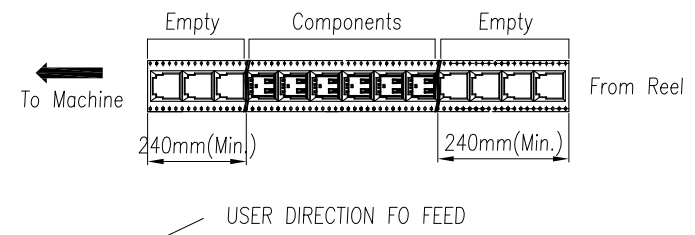

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SWMP1WHR-4A-LF
SERIES
FEMALE
90°SMT
REEL
WHITE
POST
METAL FOOT
LEADFREE
4 PIN A TYPE

DESCRIPTION: USB-A(F)SMT 有腳(外殼直腳式) REEL