


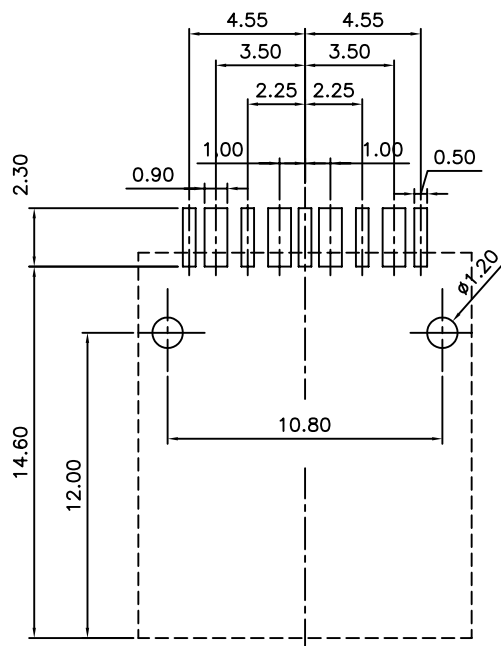
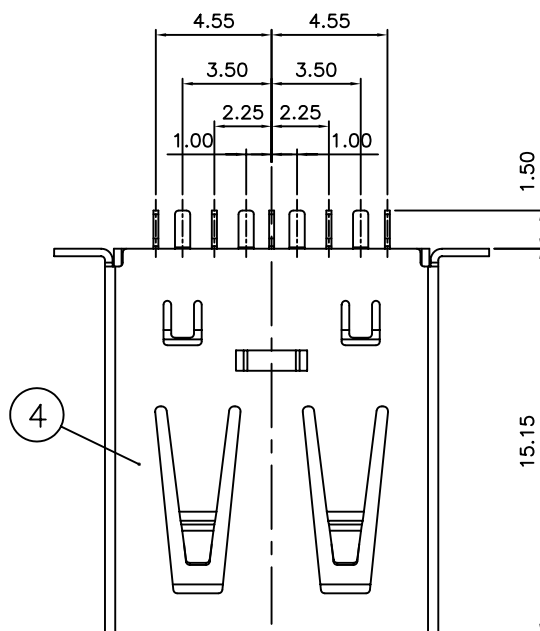


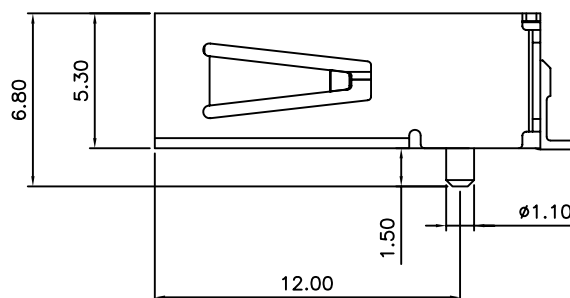

RECOMMENDED P.C. BOARD LAYOUT

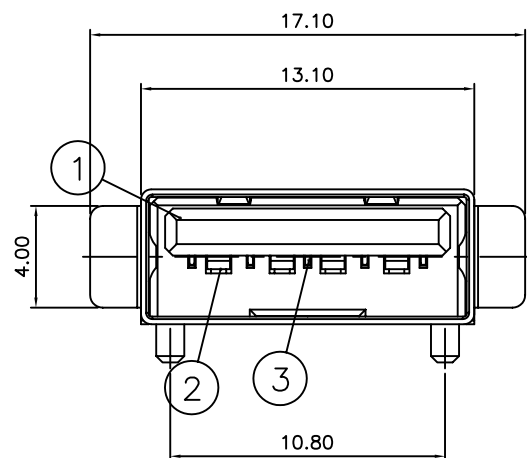

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	LCP	(Black)
2	CONTACT	4	Phosphor Bronze	Contact:1u"Gold Tails:100u" Tin(Lead Free)
3	CONTACT	5	Phosphor Bronze	Contact:1u"Gold Tails:100u" Tin(Lead Free)
4	SHELL	1	STAINLESS	50u"NICKEL PLATING

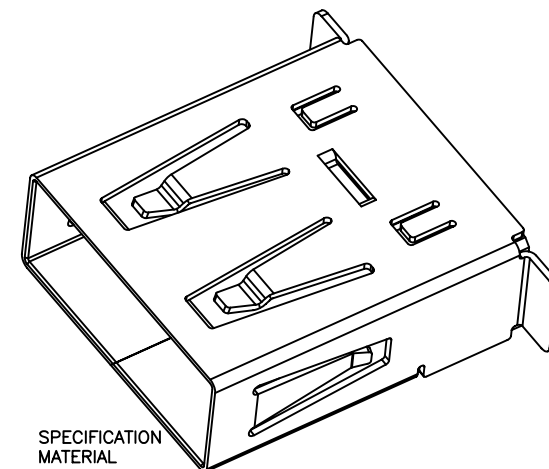

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current:1.0A

Operating temperature: -30°C ~ +60°C

Storage temperature: -40°C ~ +85°C

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 250 VAC / minute

Contact resistance: 60 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 4.2N(0.43kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION




X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

USB-SWPEBKR-9A-LF
SERIES | | | | LEADFREE
FEMALE | | | | REEL
90°SMT | | | | BLACK
POST

DESCRIPTION: I/O CONNECTOR SMD type-9 position

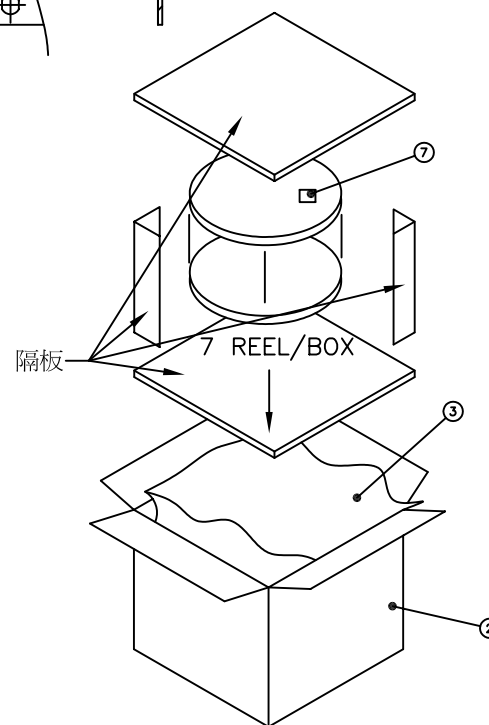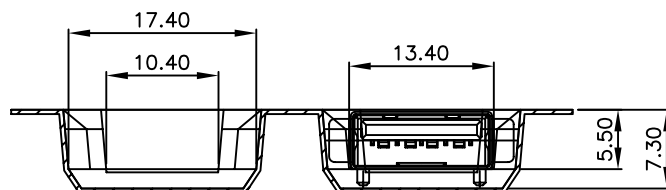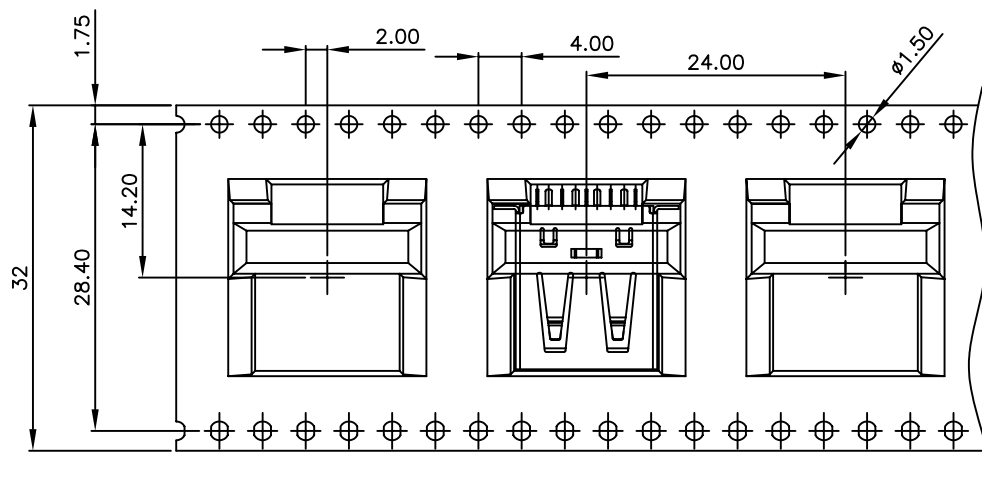

ITEM 項目	PARTS NAME 零件名稱	FINISH/REMARK 處理/備註
1	I/O CONNECTOR	2.1 KPCS/BOX
2	BOX	7 PCS REEL/BOX
3	WATERPROOF BAG	1 PCS
4	REEL	300PCS/REEL
5	COVER TAPE	W=32mm
6	CARRIER TAPE	13M/REEL
7	LABEL	批號標籤

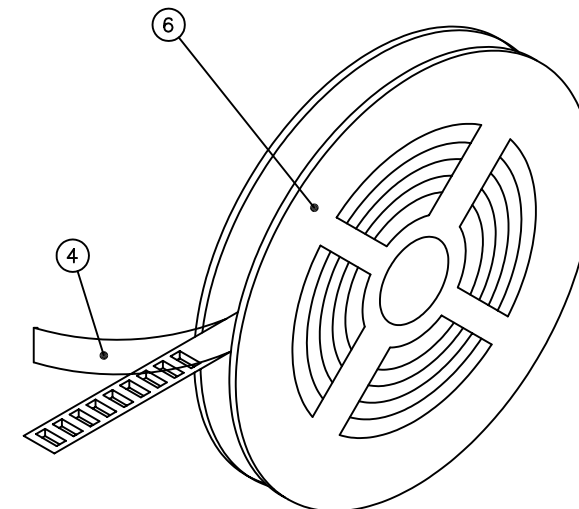

NOTES

- 1.MATERIAL: PS (Color: black)
- 2.DEFORMATION(變形)&DAMAGE(損壞): NA.(不可)
- 3.PACKING: REEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

USB-SWPEBKR-9A-LF
SERIES T T T T LEADFREE
FEMALE REEL 9 PIN A TYPE
90°SMT BLACK EAR POST

DESCRIPTION: I/O CONNECTOR SMD type-9 position