
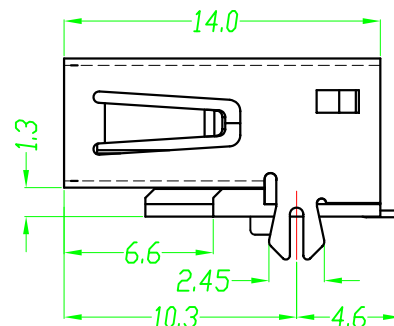
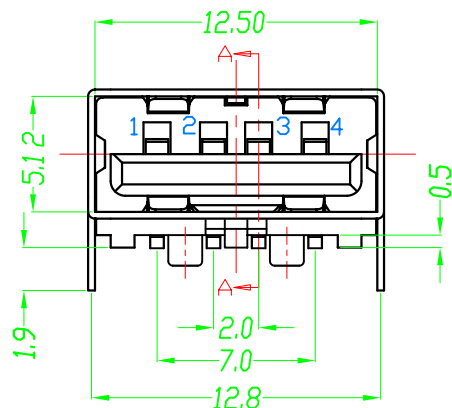
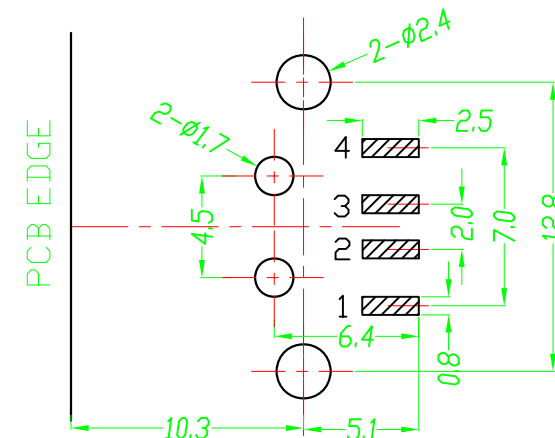


SECTION A-A

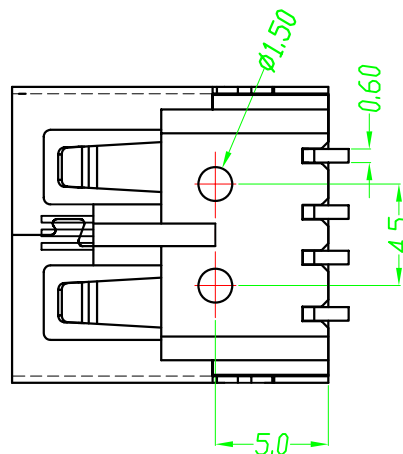

PCB LAYOUT
(BOTTOM VIEW)

Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage:
 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	LCP G.F	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u",Ni:40~60u" Tin:120~200u"
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.38
 .X ± 0.25
 .XX ± 0.13
 .XXX ± 0.05
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB-SWVZ1FXPBK-4A-LF
 SERIES | FEMALE 90°SMT RVS | CLIP | POST FLANGELESS | BLACK | LEADFREE 4 PIN A TYPE

DESCRIPTION: USB TYPE A FLAT 4 PIN SMT