

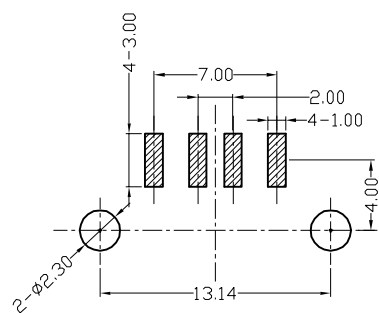
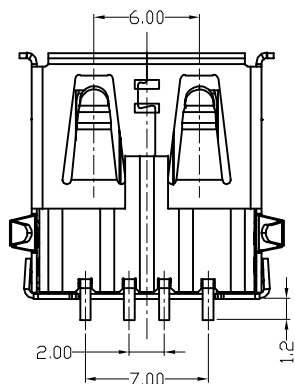
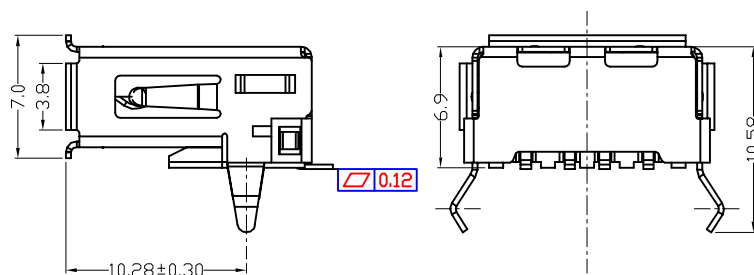


Material:

- (1). Insulator :LCP+30%GF, UL 94V-0
- (2). Contact : Brass.
- (3). Shell : Brass.
- (4). Finish :

Contact = Gold plated on contact area &
Tin plated on terminal area
Shell = Nickel plated.



RECOMMEND P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.45

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USB-SWcc-4A-LF
SERIES | | LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
90°SMT
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com