


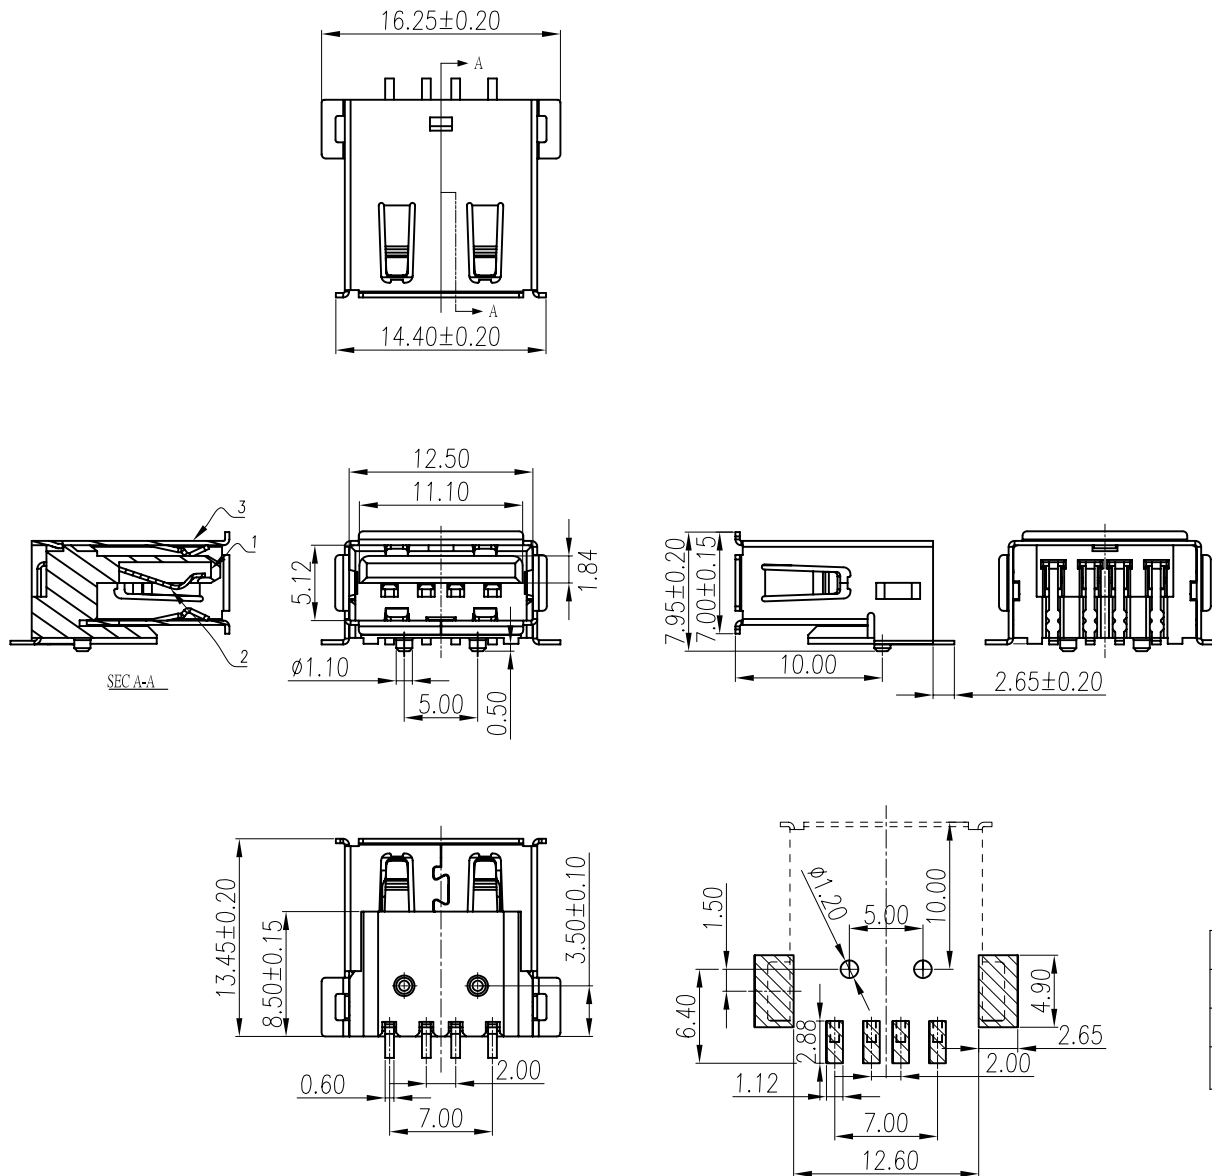

Note:

1.Material:

1.1 Insulator: PA6T UL 94-V0 rated.

1.2 Contact: Brass,t=0.25mm.

1.3 Shell: Brass,t=0.30mm.

2.Specification:

2.1 Rated voltage and current:1.5A at 250V AC minimum.

2.2 Dielectric withstanding voltage: 500V AC/1 minute without breakdown.

2.3 Contact resistance:Before life test 30m ohm max, After life test 50m ohm max.

2.4 Insulation resistance:1000M ohm min.

2.5 Insertion force:35 Newtons maximum.

2.6 Extraction force:10 Newtons minimum.

2.7 Solderability:Terminal shall be immersed in flux before text, Then dip in molten solder for 5 ± 0.5 sec. At $245 \pm 5^\circ\text{C}$.

3.Finishes:

3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".

3.2 Shell: Nickel plated.

3	Shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.25mm	Gold Flashed
1	Housing	1	PA6T	UL 94-V0	Black/Ivory/white
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

USB-SWxx-4A-LF
SERIES | | | LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
90°SMT
FEMALE

DESCRIPTION: