

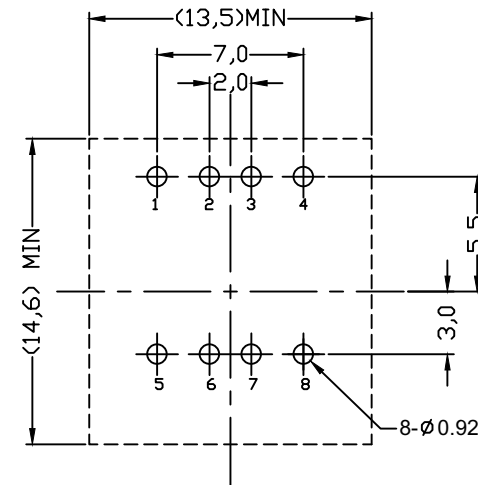
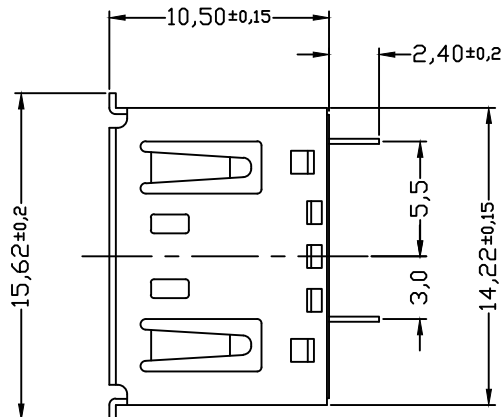


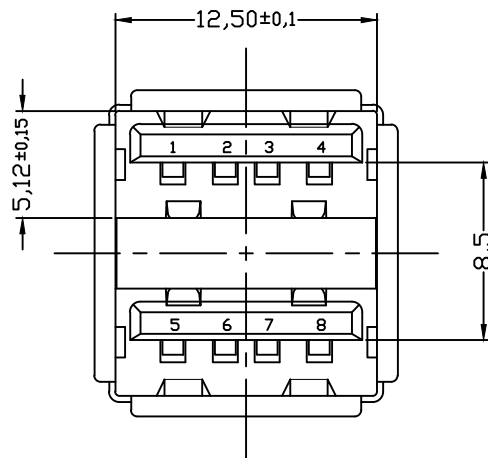

Recommend P.C.B Layout

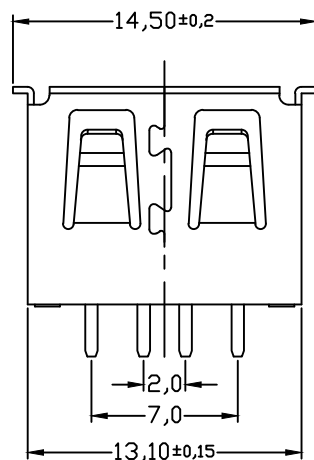

Specifications:

- 1.1 Current rating: 1 A Max.
- 1.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 1.3 Contact resistance: 30mΩ Max.
- 1.4 Insulation resistance: 1000MΩ Min at DC 500V
- 1.5 Total mating force: 3.5 Kg Max.
- 1.6 Total unmating force: 1.0 Kg Min.
- 1.7 Temperature range: -40℃~+105℃

4	中夹片	1	黄铜	NICKEL PLATING	
3	胶蕊	1	PBT 30%G		COLOR: BLACK/WHITE...
2	端子	8	C5191H	NICKEL PLATED OVER ALL 80u" TIN/GOLD PLATING	GOLD/1,3,5,10,15,30u"
1	外壳	1	黄铜	NICKEL PLATING	
序号	名称	数量	材料		备注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USB1-FD10xx-4A-LF

SERIES

FEMALE

LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
HIGH 10.5mm
DIP 180°

DESCRIPTION: