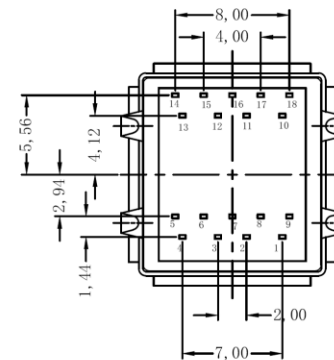
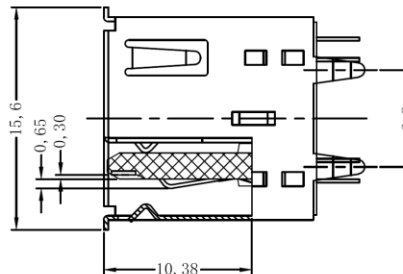
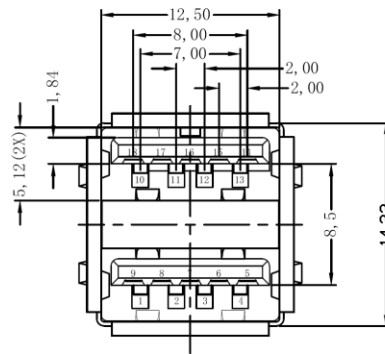
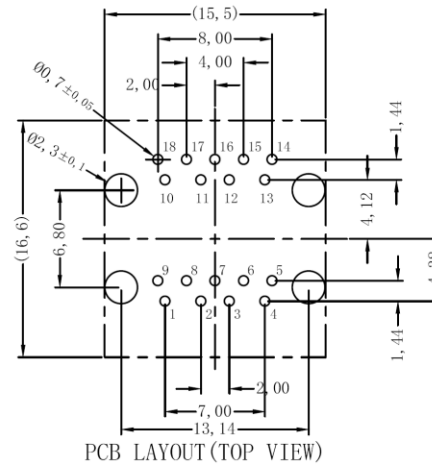



SPECIFICATIONS:
 Contact current Rating:1Amperes.
 DIELECTRIC Withstanding Voltage:AC 500V
 at sea level
 Insulation resistance:1000Megohms Minimum.
 Contact Resistance:30mΩ Max
 operating Temperature:-55° to+85°

MECHANICAL CHARACTERISTICS:
 Mating Force:3.57Kg. Maximum
 Unmating Force:1.02kg. Minimum.

5	中弹片	1	不锈钢		T=0.30
4	后塞	1	PBT 30%G		COLOR: WT/BK/BLUE
3	胶蕊	1	PBT 30%G		COLOR: WT/BK/BLUE
2	端子	18	COPPER ALLOY	NICKEL PLATED OVER ALL SURF TM/GOLD PLATING	GOLD/1-30u"
1	外壳	1	黄铜	Ni PLATING	T=0.30
序号	名称	数量	材料	表面	备注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

USBB1-FD14xx-9A-LF

SERIES

FEMALE
 DIP 180°

LEADFREE
 9 PIN A TYPE
 BK:BLACK
 WH:WHITE
 BL:BLUE
 HIGH 14.9mm

DESCRIPTION: