
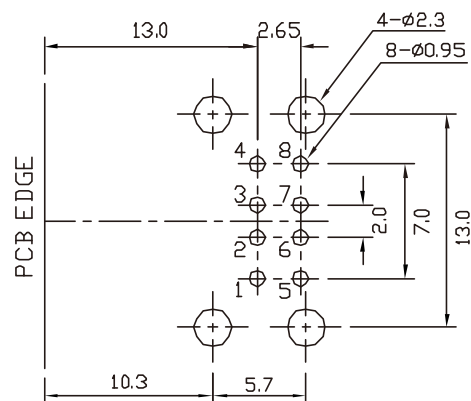
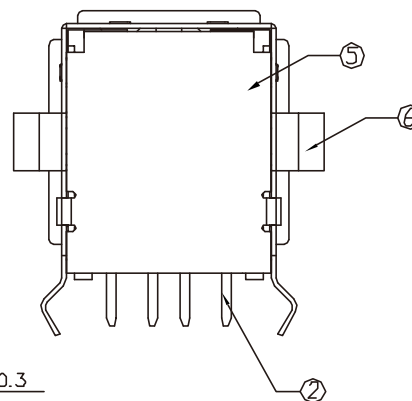
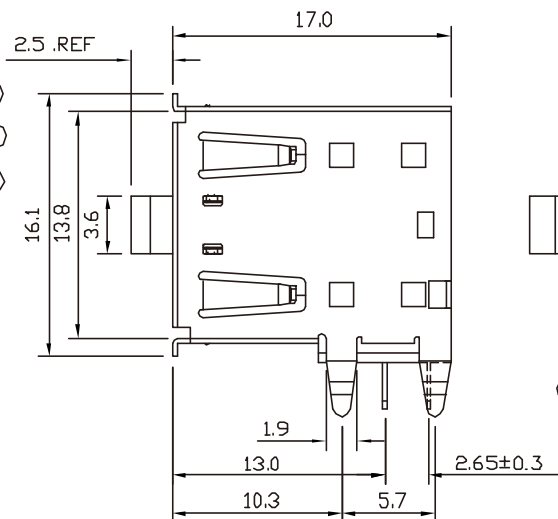


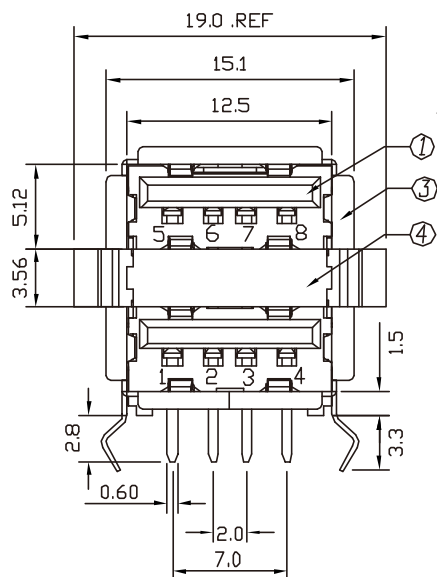

USBB1-FREWH-4A-LF
LEADFREE
RoHS Compliant

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1).

Durability (Life Test): 1500 Cycles.

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE	1	
2	PIN TERM.	PHOS. BRONZE,T:0.25	GOLD-TIN PLATED	8	Gold:~3u"; NI:40~60u"; TIN:20u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
4	SPRING CLIP	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
5	REAR SHELL	SPCC,T:0.3	NICKEL PLATED	1	NI:80~120u"
6	SPRING SHIELD	STAINLESS,T:0.1		1	

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. USBB1-FREWH-4A

DWG NO. USBB1-FREWH-4A

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

ANG

DESCRIPTION: DUAL USB A TYPE 8 PIN

AREA

REVISIONS

HK

DATE

煜倫股份有限公司