
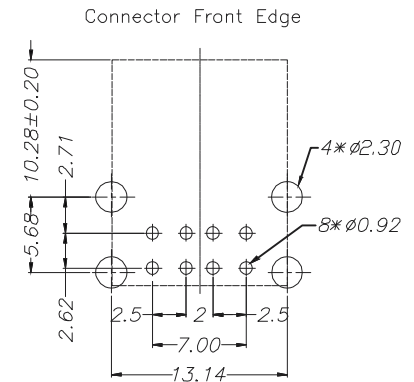
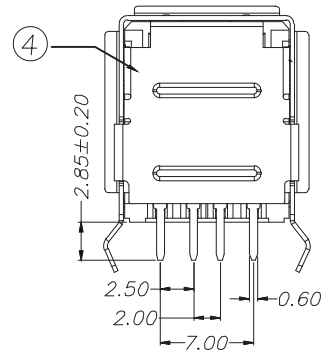


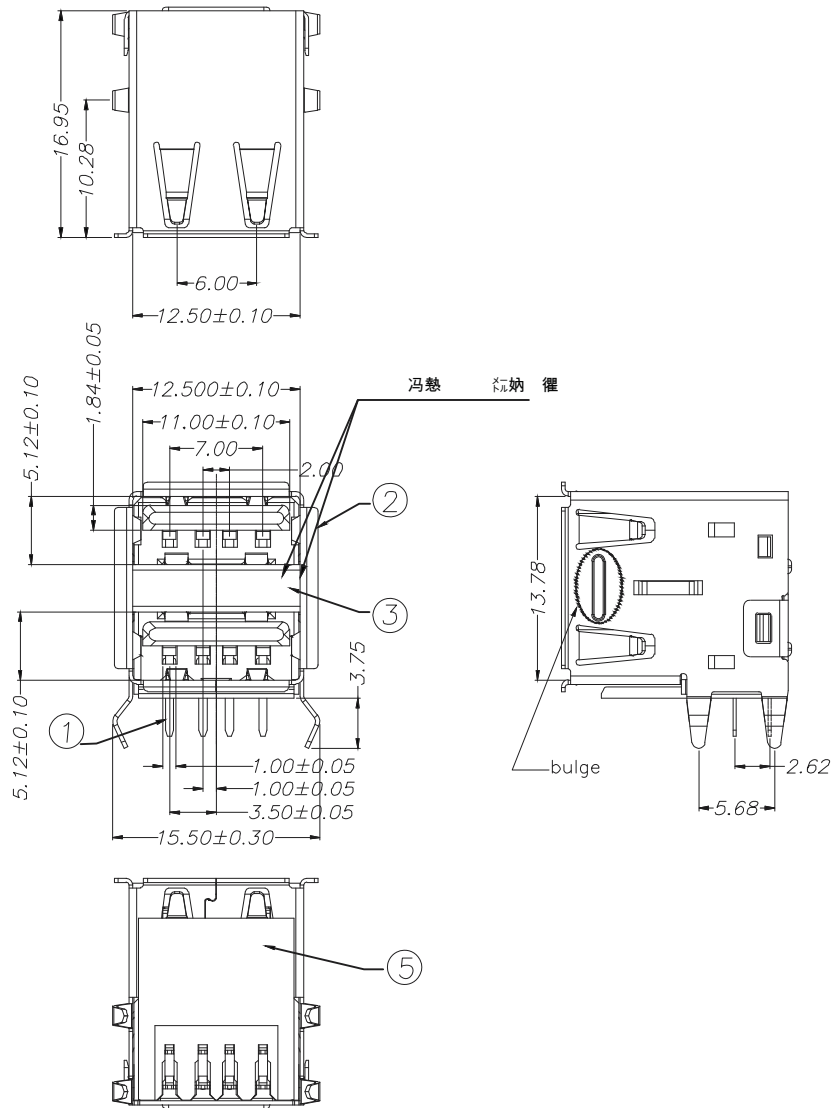

Printed Circuit Board (PCB) Layout
(T=1.60mm TOL:±0.05mm)

5	HOUSING	PBT+30%G.F, UL94V-0		BLACK
4	BACK COVER	SK7	80u"Nickel Plated & 50u"Copper Plated	
3	MIDDLE BULLET	SK7	80u"Nickel Plated & 50u"Copper Plated	
2	SHELL	SPCC-SD	Bright Tin 100u"Min Plated & Nickel 50u" MinPlated	
1	CONTACTS	Copper Alloy	Au1u" & 100u"Matte Tin Plated &50u" Nickel Plated	
	NAME	MATERIAL	PLATING	COLOR

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

SIZE A4

PPOJECTION

ANG, ±

照片框

ORDER INFORMATION

USBB1-FRBK-4A-LF

SERIES

LEADFREE
4 PIN A TYPE

BLACK
DIP 90°
FEMALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: