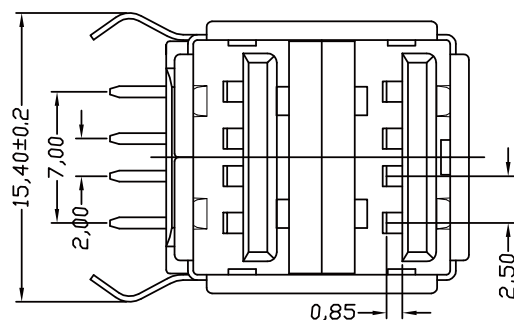
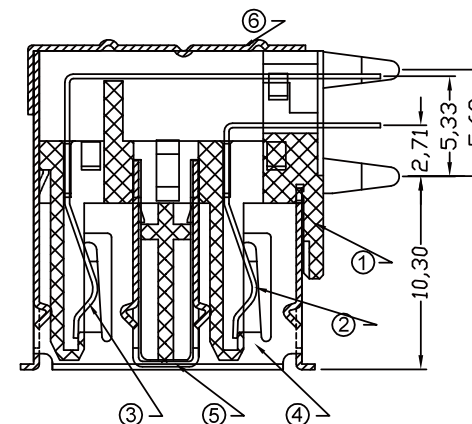
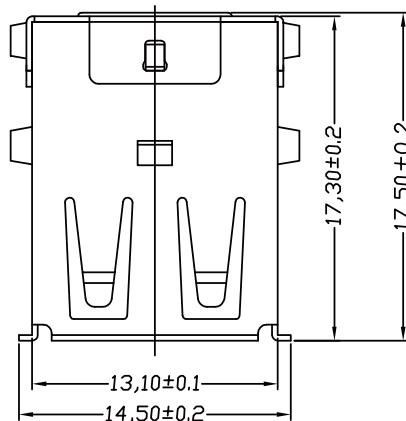
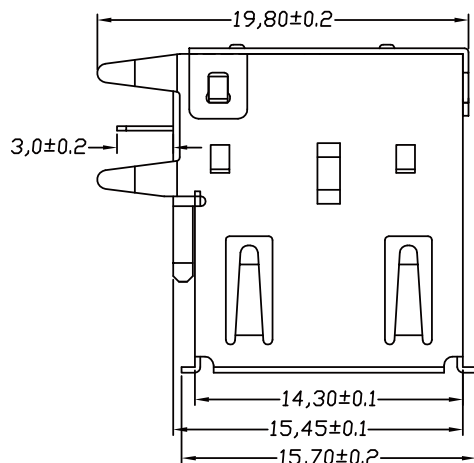


P.C.B. LAYOUT

Specifications:

- 1.1 Current rating: 1 A Max.
- 1.2 Dielectric withstanding voltage:
500 V(ac) for 1 minute.
- 1.3 Contact resistance: 30mΩ Max.
- 1.4 Insulation resistance: 1000MΩ Min at DC 500V
- 1.5 Total mating force: 4.0 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.
- 1.7 Temperature range: -55℃ ~ +105℃.

6	SHELL-C	C2680-H/2/SPCC	T=0.30	Ni 100U"	1
5	SHELL-B	C2680-H/2	T=0.30	Ni 100U"	1
4	SHELL-A	C2680-H/2/SPCC	T=0.30	Ni 100U"	1
3	TERMINAL-B	C5191-H	T=0.25	Sn 100U" + Au 1~30U"	4
2	TERMINAL-A	C5191-H	T=0.25	Sn 100U" + Au 1~30U"	4
1	HOUSING	PBT ROHS UL94-V0		WHITE/BLACK	1
No	PART NAME	MATERIAL	THICK	FINISH	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

USBB1-FRXcc-4A-LF

SERIES
LEADFREE
4 PIN A TYPE
BK:BLACK
WH:WHITE
NON SPRING
DIP 90°
FEMALE

DESCRIPTION: 90°双层半包成品(平弹/带后盖)