
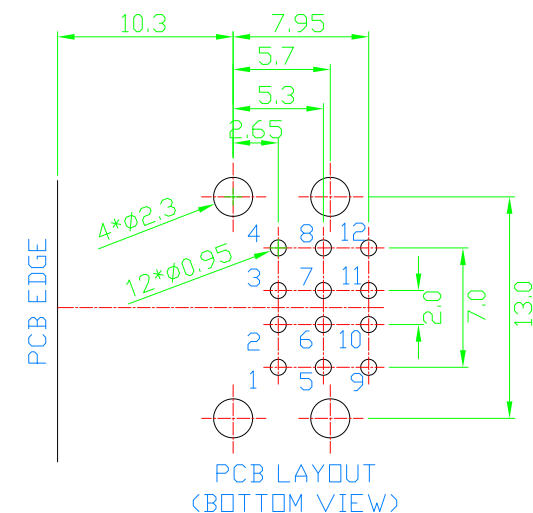
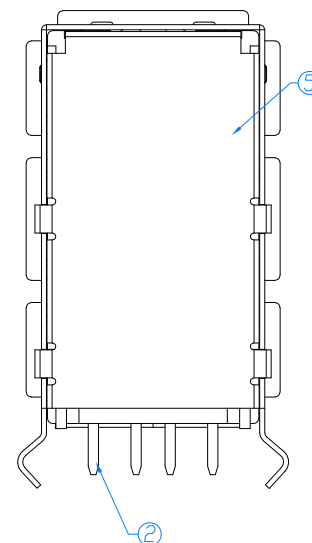


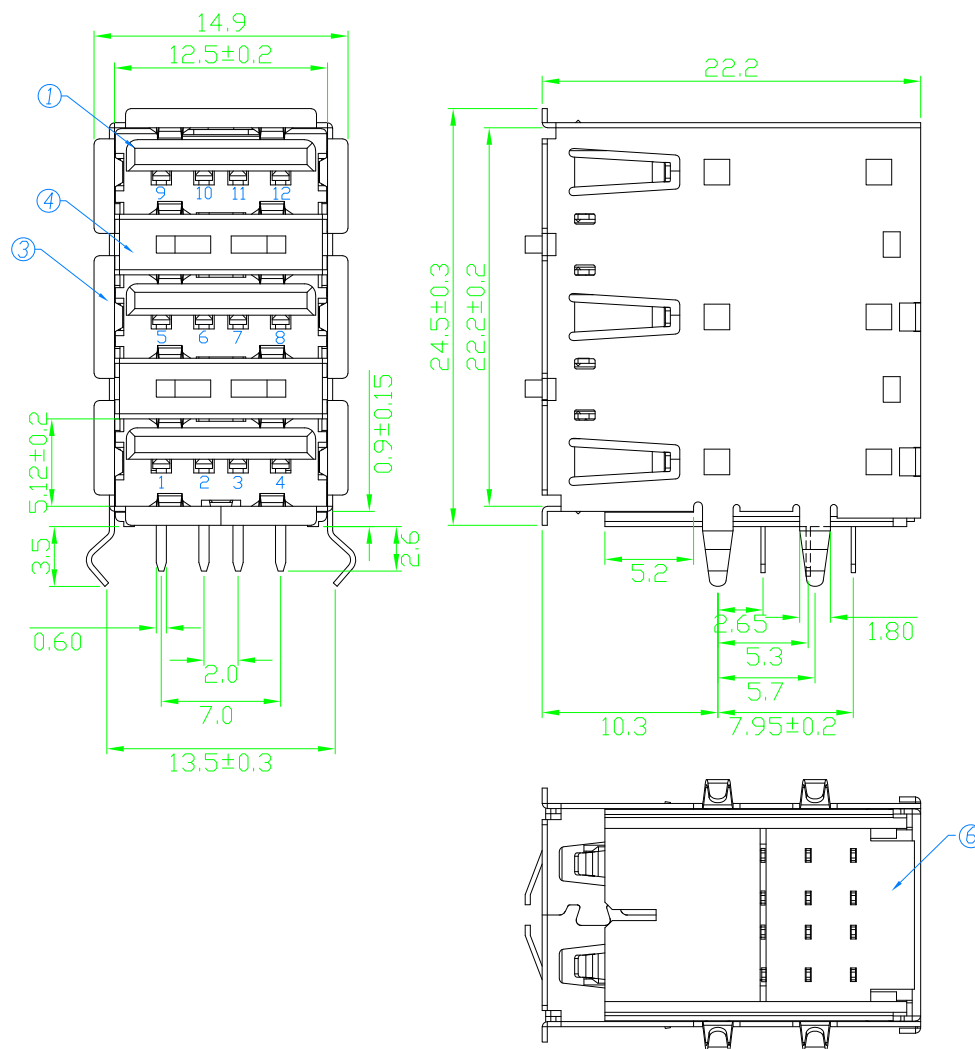

Specification:
Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:
 500V AC (rms) for 1 Minute(Rev. 2.0)
Durability (Life Test): 1500 Cycles
Insertion Force: 35 Newton Maximum.
Extraction Force: 10 Newton Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	PIN TERM.	PHOS. BRONZE:0.25	GOLD-TIN PLATED	12	Gold30u"; Ni:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.3	TIN PLATED	1	TIN:120~200u"
4	SPRING CLIP	BRASS,T:0.3	TIN PLATED	1	TIN:120~200u"
5	REAR SHELL	SPCC,T:0.3	NICKEL PLATED	1	NI:80~120u"
6	BOTTOM COVER	PBT G.F.	BLACK	1	

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

USBC1-FRSBKS30-4A-LF

SERIES

FEMALE

BLACK

SPRING

DIP 90°

LEADFREE

4 PIN A TYPE

SEMI GOLD 30u"

DESCRIPTION: