





NOTES:

1. MATERIAL:

HOUSING:PA6T+30%GF HF UL 94V-0 ; COLOR: BLACK
COVER:PA6T+30%GF HF UL 94V-0 ; COLOR: BLACK
INNER INSULATOR:PA6T HF+30%GF UL94-V0 MOLDED COLOR:BLUE(PANTONE:300C)
INNER INSULATOR:PA6T HF+30%GF UL94-V0 MOLDED COLOR:BLACK
USB2 CONTACT:C5191H
USB3 CONTACT:C5191H
FRONT SHELL:STAINLESS STEEL(SUS304)
REAR SHELL:STAINLESS STEEL(SUS304)
FINGER:STAINLESS STEEL(SUS304)

2. FINISH:

CONTACT :GOLD PLATED IN CONTACT AREA,SEE TABLE.
[80u"] MIN NICKEL UNDERPLATED ALL OVER.
[100u"-~120u"] MATTE TIN ON SOLDER TAILS.
FRONT SHELL:
[100u"] MIN Cu UNDER PLATE OVER ALL.
[50u"]MIN NICKEL PLATED ON ENTIRE WITH
FINGER AND REAR SHELL:CLEAN

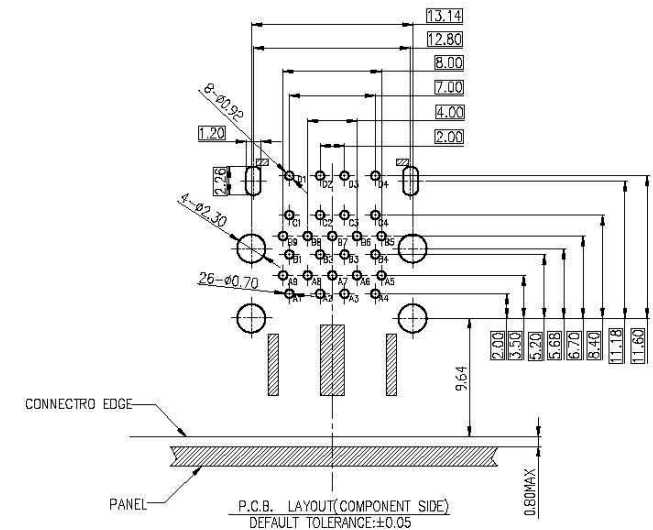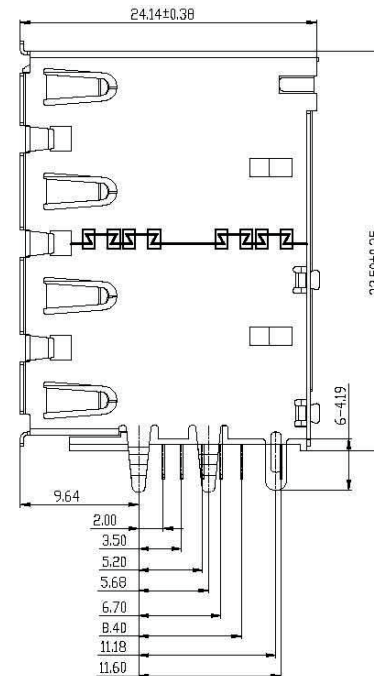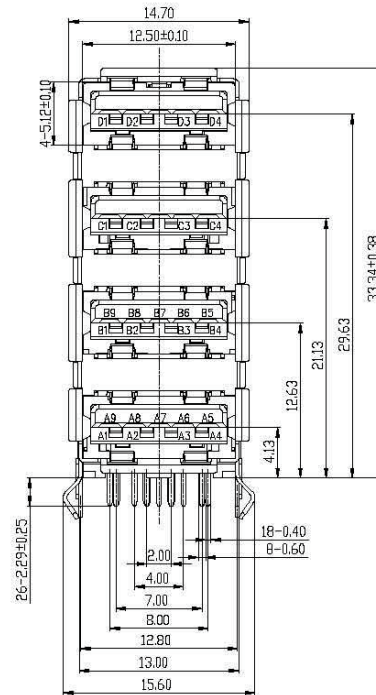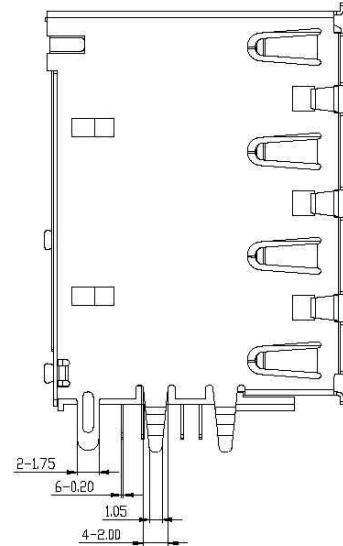

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.38
.XX ± 0.15
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

USB1-FRXXKB-4A9A-LF

SERIES 4 LAYER FEMALE DIP 90° BLACK NON SPRING
BLACK 4A + BLUE 9A LEADFREE

DESCRIPTION: PITCH 3.96mm EDGE CARD CONN. PRESS FIT TYPE