
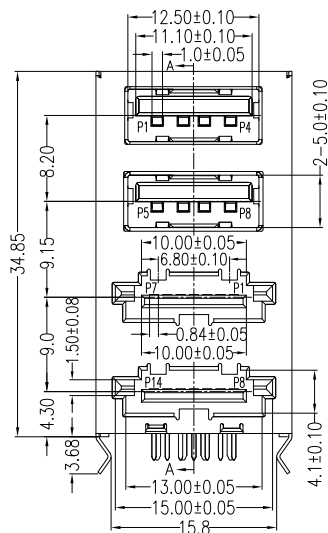


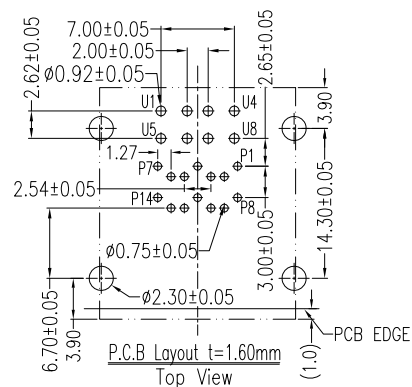


Signal Name	
Pin Number	USB
S1	VBUS
S2	D-
S3	D+
S4	GDN

Signal Name	
Pin Number	eSATA
S1	GND
S2	RX+
S3	RX-
S4	GND
S5	TX-
S6	TX+
S7	GND

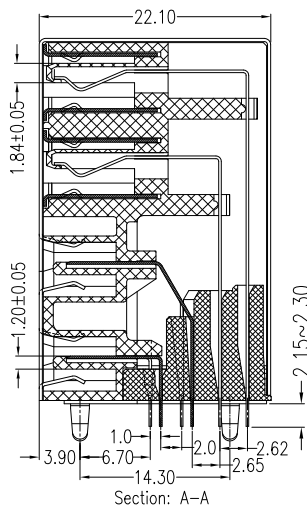

3D Drawing

NOTES:

*Material

Housing: PBT,UL 94-0 Rated
 Retainer: Nylon66,UL 94-0 Rated
 eSATA's Contact: Brass,Gold plating over Nickel on contact area; Tin Plating on Solder Tail.
 USB's Contact: Phosphor Bronze,Gold plating over Nickel on contact area; Tin Plating on Solder Tail.
 Shell(Inside): SUS304
 Shell(Outside): Brass, Nickel plating

*e SATA Electrical Specification

Current Rating: 1.5 Ampere per contact
 Contact Resistance: 30mOHM Max
 Insulation Resistance: 1000M OHM MIN
 Dielectric Withstanding Voltage:500VAC.

*USB Electrical Specification

Rated Voltage and Current : 1.5A at 250V AC min;
 Contact Resistance: 30 Milliohms max.
 Insulation Resistance: 1000 megohms min At 500V DC.
 Dielectric Withstanding Voltage: 500 V AC For 1 minute.

*Environmental

Operating Temperature : -55°c to +125°c.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.20
 ANG ±



ORDER INFORMATION

UUEE-ARxx-AA77-LF

SERIES

LEADFREE

A+A TYPE 7+7PIN

BK:BLACK

YL:YELLOW

RD:RED

DIP 90°

FEMALE TO MALE

DESCRIPTION: Double USB+Double eSATA Plug CRT