
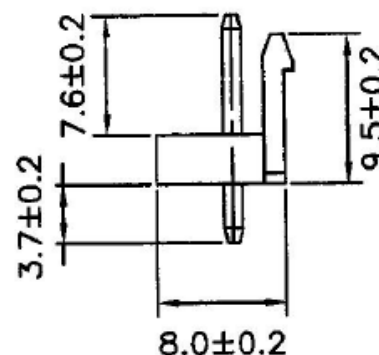


P.C. Board Layout

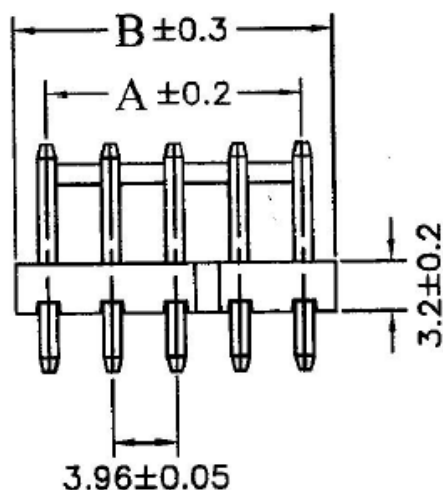

NOTES

- * Poles:2-12
- * Material:Insulator:NYLON UL94V-0 White
- * Contact:1.14mm(.045") square pin,brass,tin plated

Specifications

- * Current rating: 5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1500V AC/minute
- * Applicable PC board thickness: .063" (1.6mm)

CKTS	DIM. "A"	DIM. "B"
2	3.96	8.1
3	7.92	12.1
4	11.88	15.7
5	15.84	20.0
6	19.80	24.0
7	23.76	27.9
8	27.72	31.9
9	31.68	35.8
10	35.64	39.4
11	39.60	43.8
12	43.56	47.7

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. $\pm$ 0.50

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

VH-D-xx-LF
SERIES | LEADFREE
02~12WAY
DIP 180°

DESCRIPTION: