

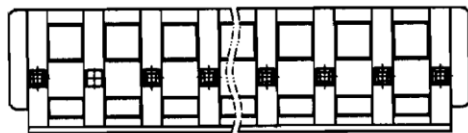
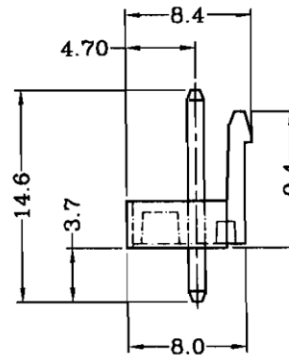
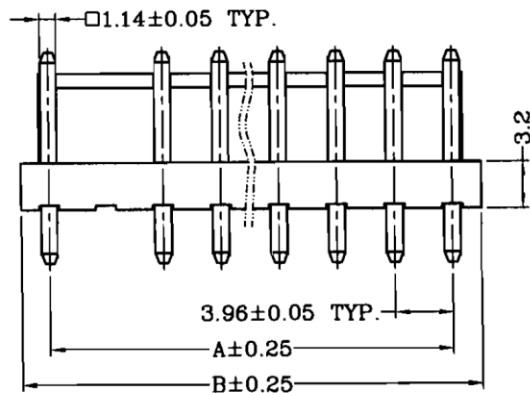



Material: *Insulator: Nylon 66 UL 94V-0 (White)
 *Contact: 1.14mm Square Pin, Brass, Tin Plated
 Note: RoHS II and Halogen Free Compliance

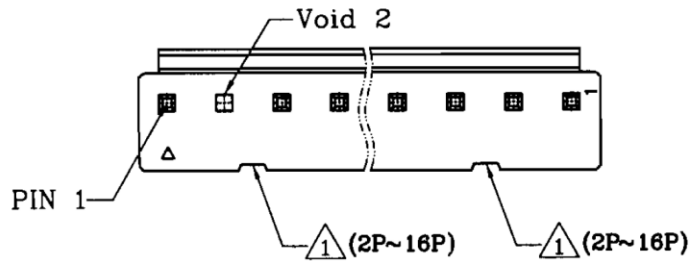

Dimensional & Ordering Information:

Circuits	Dimension		Q'TY/BAG
	A	B	
3	7.92	11.88	1000
4	11.88	15.84	1000
5	15.84	19.80	1000
6	19.80	23.76	500
7	23.76	27.72	500
8	27.72	31.68	500
9	31.68	35.64	250
10	35.64	39.60	250
11	39.60	43.56	250
12	43.56	47.52	250
13	47.52	51.48	250
14	51.48	55.44	250
15	55.44	59.40	250
16	59.40	63.36	250

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

VH-DE2-xx-LF
 SERIES | LEADFREE
 | 03~16 WAY
 | EMPTY #2
 | DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: