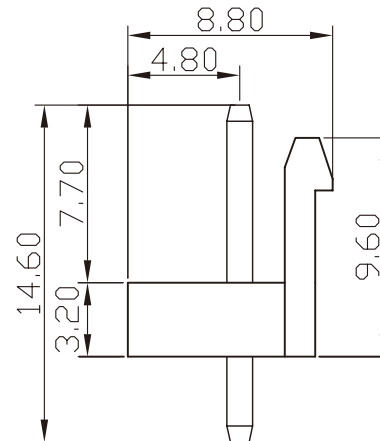
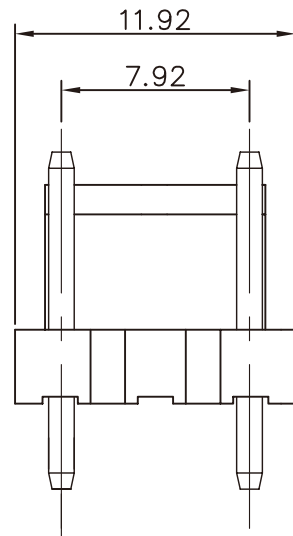
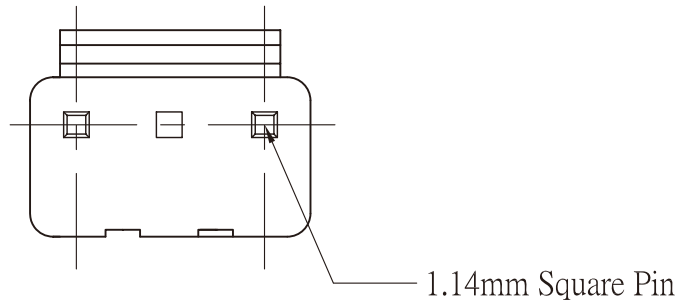


PCB LAYOUT COMPONENT SIDE

Specifications

Current Rating: 7A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C

Contact Resistance: 10MΩ Max

Insulation Resistance: 1000MΩ Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

VH-DEE-02-LF
SERIES | LEADFREE
02 WAY
EMPTY EVEN 2 PIN
DIP 180°

DESCRIPTION: