
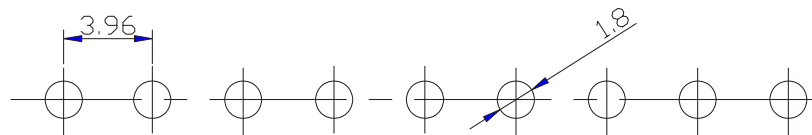
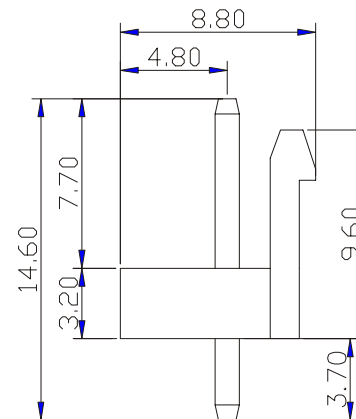


1.14mm Square Pin

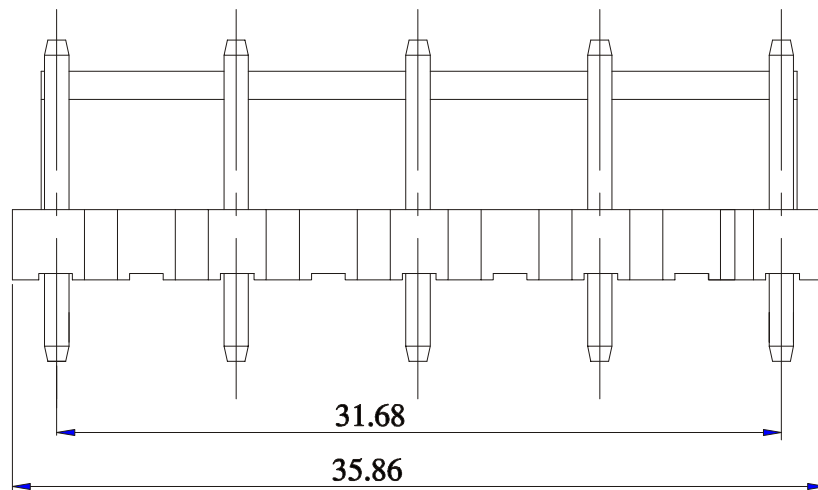

RECOMMENDED P.C.BOARD HOLE DIMM.

Specifications

Current Rating: 5A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000mΩ Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

VH-DEE-05-LF
SERIES | LEADFREE
05 WAY
EMPTY EVEN 2.4.6.8PIN
DIP 180°

DESCRIPTION: 3.96mm Wire-to-Board Header DIP 180° Type