
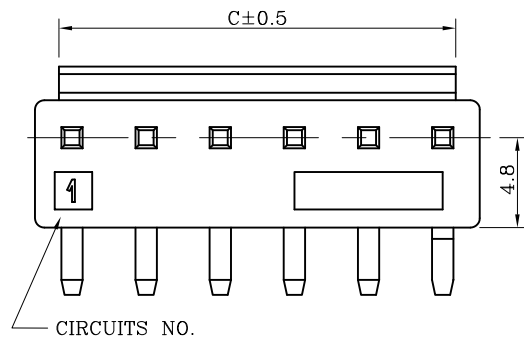

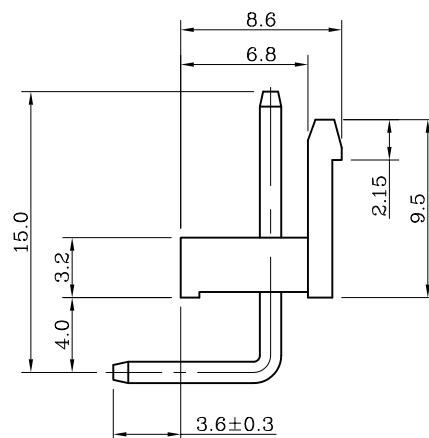


NOTES:
1.MATERIAL: NYLON66 + GLASS-FILLED 94V-0
PIN: BRASS

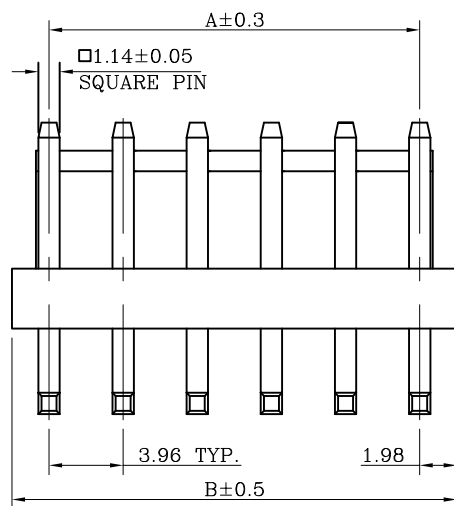

P. C. BOARD LAYOUT

TABLE-1 Δ

VOID TYPE	DESCRIPTION
N02	NO.2 CIRCUIT VOID
NXX	NO.XX CIRCUIT VOID
N2A	NO.2 & 3 CIRCUITS VOID
N2B	NO.3 & 4 CIRCUITS VOID
N3A	NO.2, 3, 4 CIRCUITS VOID
N3B	NO.3, 4, 5 CIRCUITS VOID
N4A	NO.2, 3, 4, 5 CIRCUITS VOID
NB1	NO.1 & 3 CIRCUITS VOID
NB2	NO.2 & 4 CIRCUITS VOID
NB8	NO.8 & 10 CIRCUITS VOID
NC2	NO.2, 4, 6 CIRCUITS VOID
NC4	NO.4, 6, 8 CIRCUITS VOID
NCD	NO.2, 7, 9 CIRCUITS VOID
ND2	NO.2, 4, 6, 8 CIRCUITS VOID
NE2	NO.2, 4, 6, 8, 10 CIRCUITS VOID

DIMENSIONS:

CIRCUITS	DIM. A	DIM. B	DIM. C
02	3.96	7.92	5.32
03	7.92	11.88	9.28
04	11.88	15.84	13.24
05	15.84	19.80	17.20
06	19.80	23.76	21.16
07	23.76	27.72	25.12
08	27.72	31.68	29.08
09	31.68	35.64	33.04
10	35.64	39.60	37.00
11	39.60	43.56	40.96
12	43.56	47.52	44.92
13	47.52	51.48	48.88
14	51.48	55.44	52.84
15	55.44	59.40	56.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ± 3°

PPOJECTION Φ

照片框

ORDER INFORMATION

VH-R-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 90°

DESCRIPTION: 3.96mm PITCH RIGHT ANGLE HEADER