

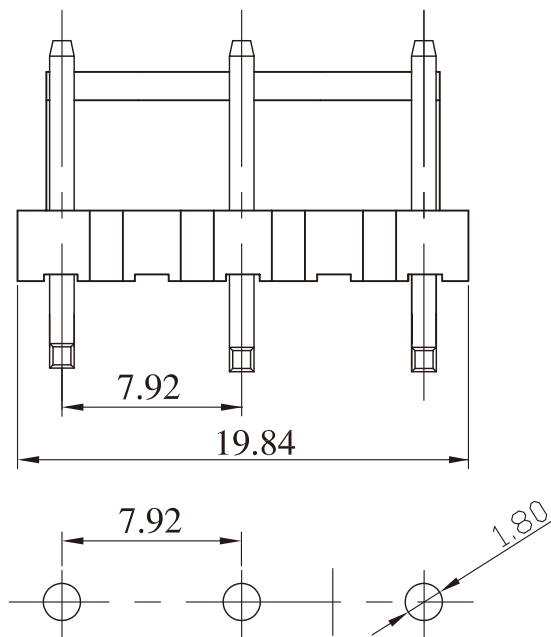


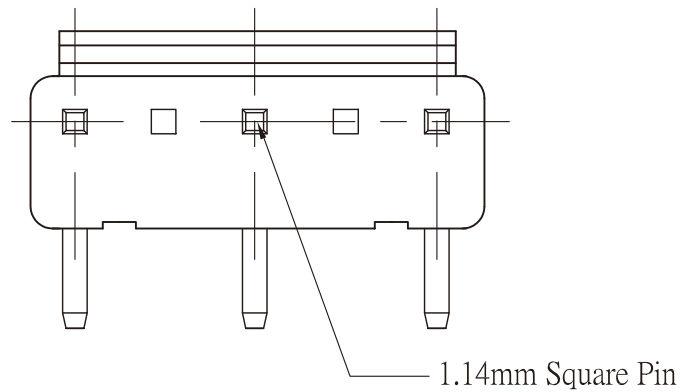

PCB LAYOUT COMPONENT SIDE

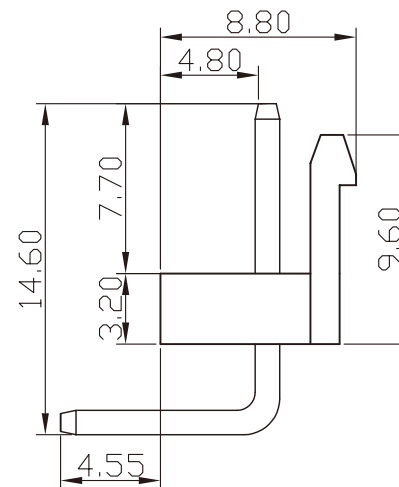

Specifications

Current Rating: 7A AC, DC

Voltage Rating: 250V AC Maximum

Operating Temp: -25°C ~ +85°C

Contact Resistance: 20MΩ Max

Insulation Resistance: 1000MΩ Min

Dielectric Withstanding Voltage: 1500V AC,DC Min

Terminal Material: Brass/Tin-plated

Material: Nylon 66, UL94V-0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

VH-REE-03-LF
SERIES | 03WAY | LEADFREE
EMPTY #2.4
DIP 90°

DESCRIPTION: 3.96mm Wire-to-Board Header DIP 90° Type