

● **MATERIALS: (RoHS Compliant)**

Housing And Cover: PBT+Glass Fiber UL94V-0, Black

Contacts: Phosphor Bronze Gold
Selective Plated

Back Shell: Zinc Alloy,Nickel Plated
Over Copper

Shell: Steel,Nickel Plated Over Copper

JackscREW: Steel,Nickel Plated Over Copper

Cable Clipper: Steel,Nickel Plated Over Copper

Flat Screws: Steel,Nickel Plated Over Copper

● **ELECTRICAL CHARACTERISTICS:**





Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 250V AC




Insulation Resistance: >500M Ω /Min

Contact Resistance: 35m Ω /Max

Operation Temperature: -55°C ~ +85°C

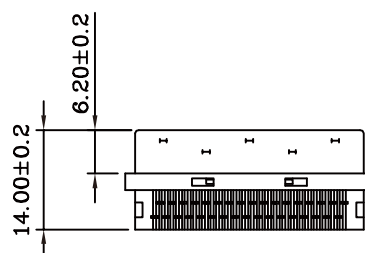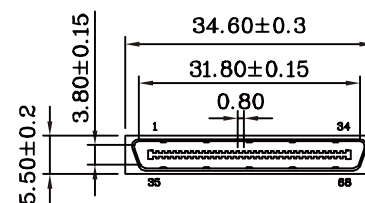

Termination Cover
(2 Places)

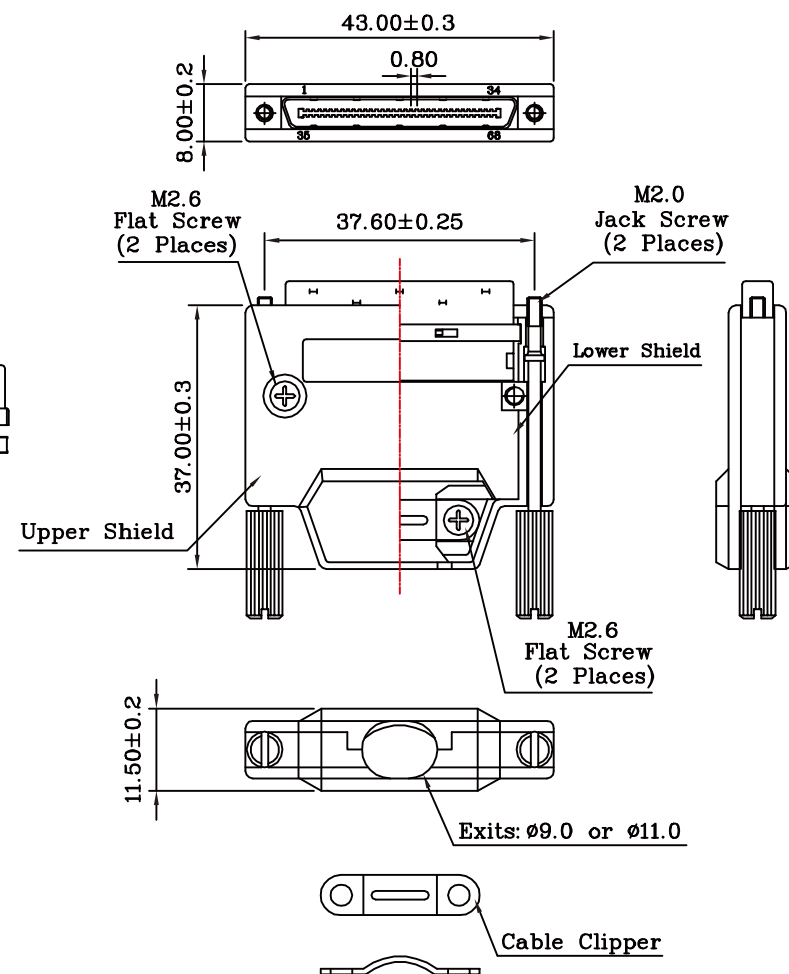

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

VHC-PF2M-068-LF

SERIES | LEADFREE
68 WAY
METAL
IDC
MALE

DESCRIPTION: 0.8(.0315") (VHDCI) 68P Cable Plug Connector I.D.C Assembly Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com