

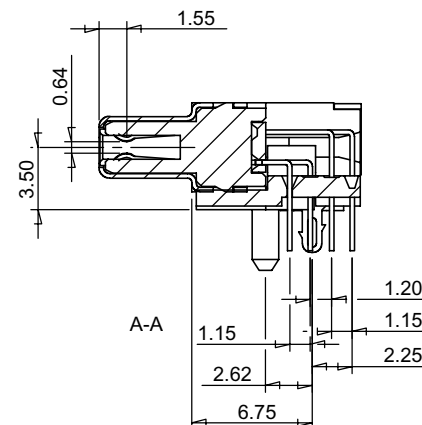
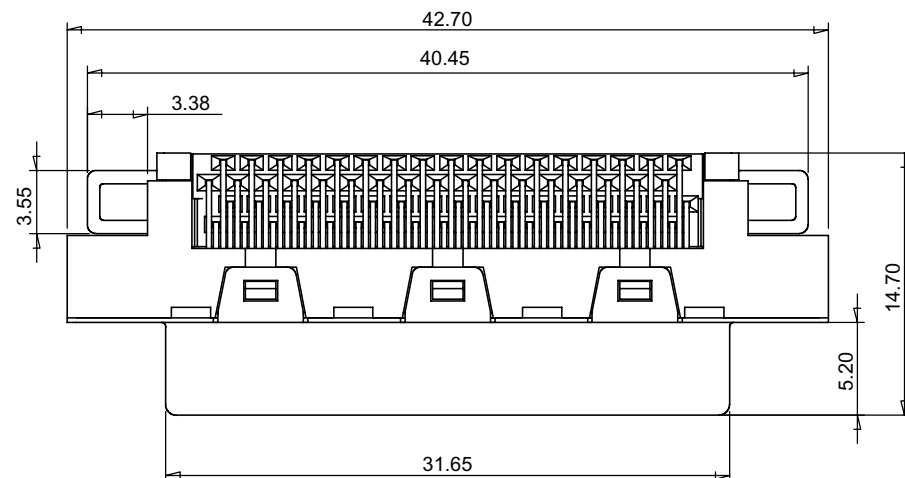
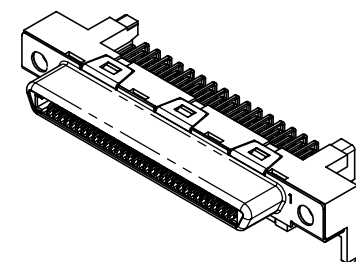


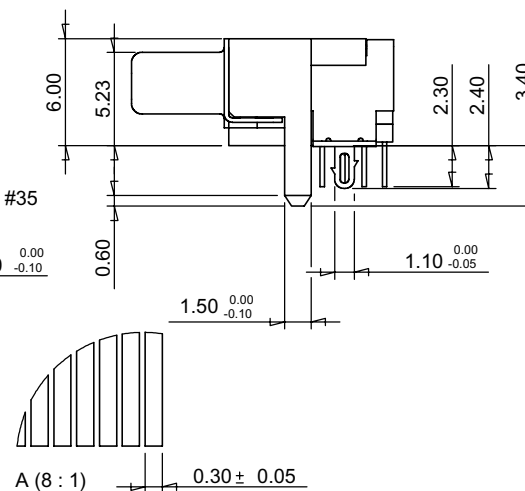

- NOTES:
- 1.MATERIAL:
HOUSING:HIGH TEMP THERM OPLASTIC
COLOR:BLOCK.
UL 94V-0
TERMINAL:PHOSPHOR BRONZE
SHELL:STEEL
 - 2.PLATING
CONTACT AREA:GOLD OVER NICKEL.
TAIL AREA:TIN-LEAD OVER ALL.
SHELL:Ni OVER ALL.
 - 3.RECOMMENDED PCB THICKNESS:1.60mm
 - 4.CONTACT AREA ALIGNMENT MUST BE WITHIN 0.15mm.

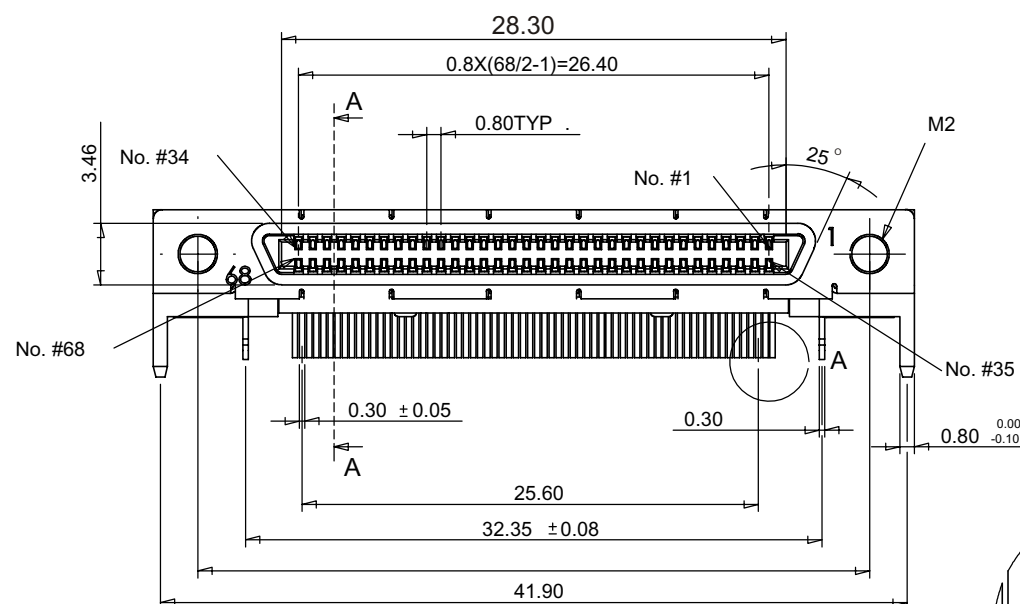

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框


ORDER INFORMATION

VHC-SRN-068-LF
SERIES
LEADFREE
68 WAY
NUT
DIP 90°
FEMALE

DESCRIPTION:VHDCI 0.8mm PITCH 68 PIN RIGHT ANGEL RECEPTACLE 3.5mm CENTE R HIGH

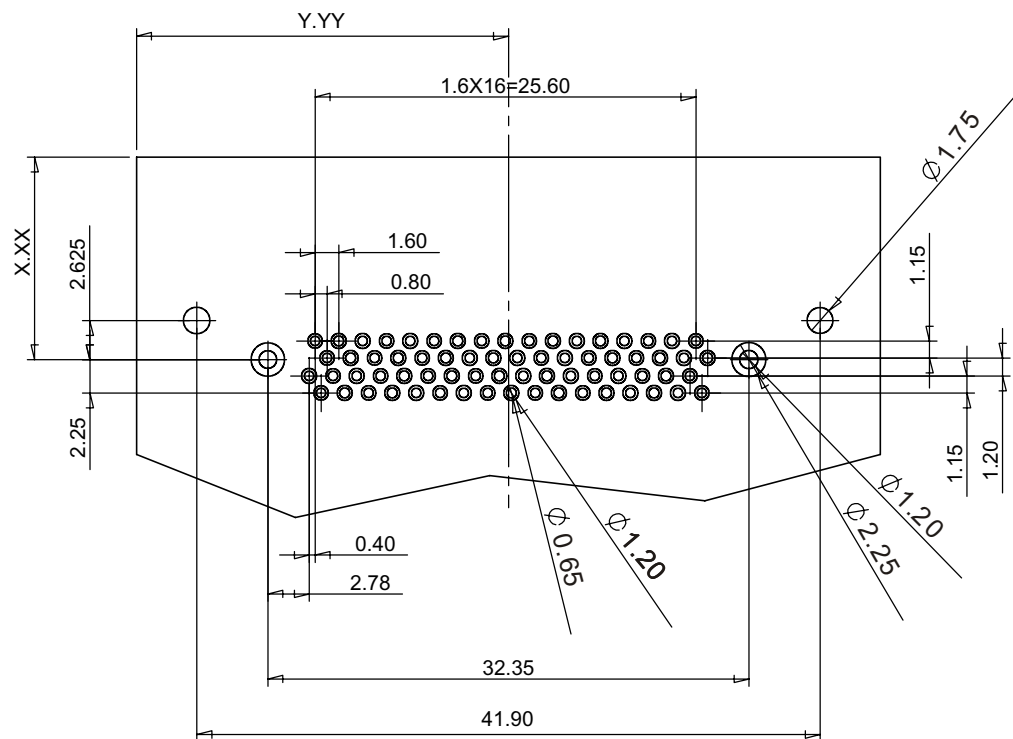

BACK SIDE

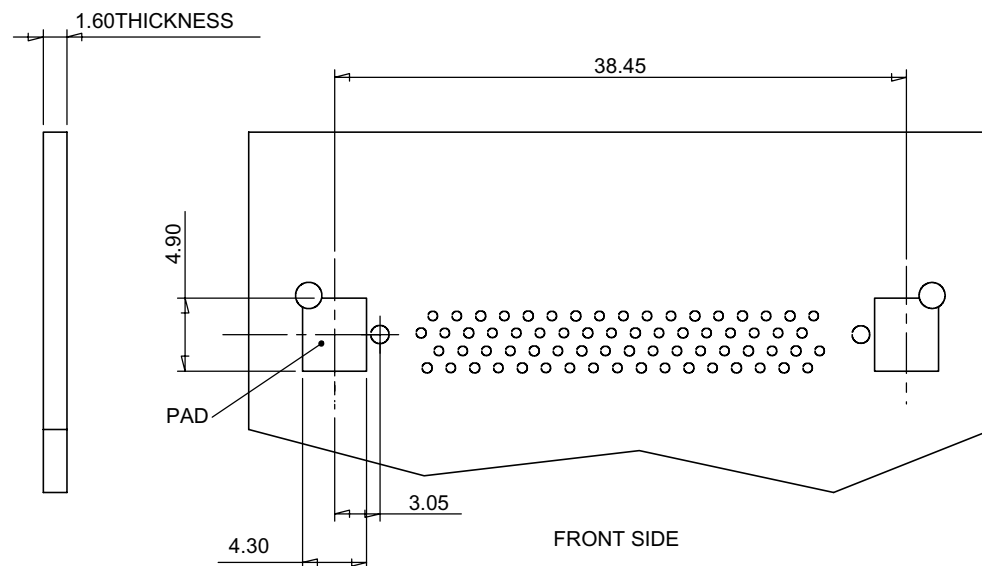

FRONT SIDE

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X, ±

UNIT / mm

SCALE 1 : 1

.XX, ±

DATE

.XXX, ±

ANG, ±

SIZE A4

PPOJECTION

ORDER INFORMATION

VHC-SRN-068-LF
SERIES NUT DIP 90° FEMALE
LEADFREE
68 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: VHDCI 0.8mm PITCH 68 PIN RIGHT ANGEL RECEPTACLE 3.5mm CENTE R HIGH