


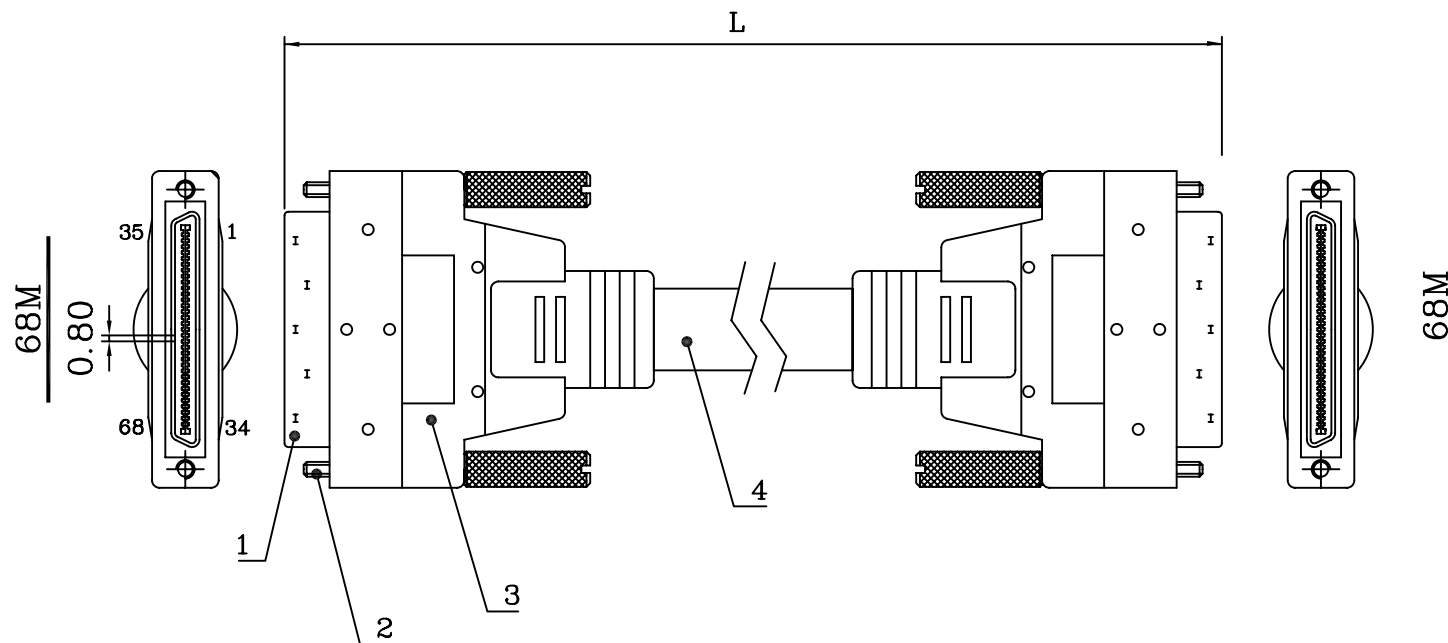

- | Length Unit:CM | Tolerance |
|----------------|-----------|
| < 50 | ± 2 |
| 50-100 | ± 3 |
| 101-150 | ± 4 |
| 151-300 | ± 5 |
| 301-500 | ± 6 |
| > 500 | ± 10 |

	COMPONENTS	DESCRIPTION	Q'TY
1	HFMC68M	VHDCI 0.8mm 68P Male Connector Shell: Steel Tin Plated Insulator: Black P.B.T Contact: Phosphor Bronze 30μ" Gold Plated	2
2	Jackscrew	M2.0X0.4 Metal Surface Plated: Black	4
3	Hood	P.V.C Molded Color: Black Inner Molded With Copper Foil Shielded	2
4	Cable	20276 80°C 30V DER AN 28AWG/2 Pairs ID: 0.65mm And 30AWG/32Pairs ID: 0.65mm OD: 9.8mm Impedances: 132Ω ±10Ω Color: Black L: XXXXXmm	1

煜倫股份有限公司

照片框

28/30 AWG
68 TO 68 WAY

DESCRIPTION: SCSI Cable L: XXXXCM
