


Red Wire Black Wire

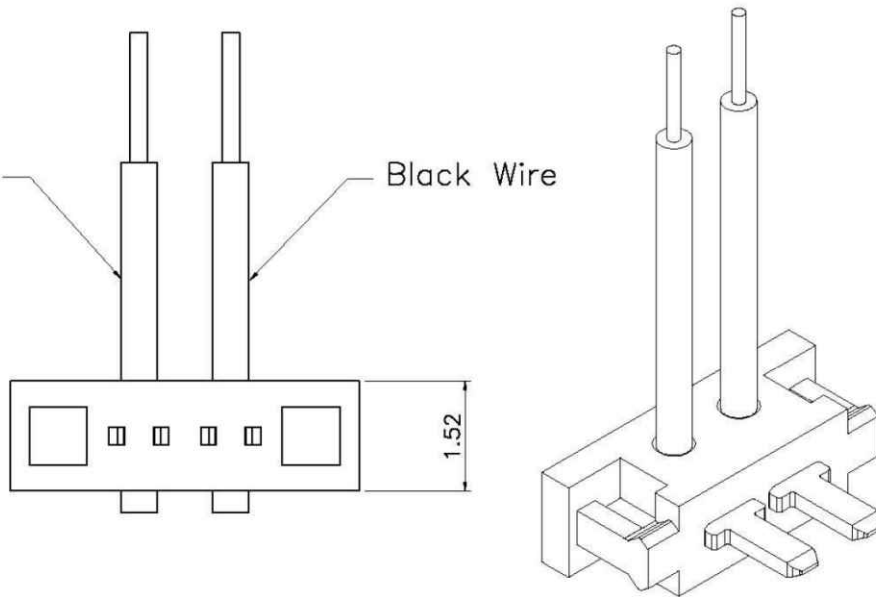



Material:

Housing: Polycarbonate UL94V-2.
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 500V For 1 minute.
Insulator Resistance: 500MΩ at DC 500V.
Contact Resistance: 30mΩ at DC 100mA.
Operating Temperature: -55°C~+85°C.

***RoHS Compliant**

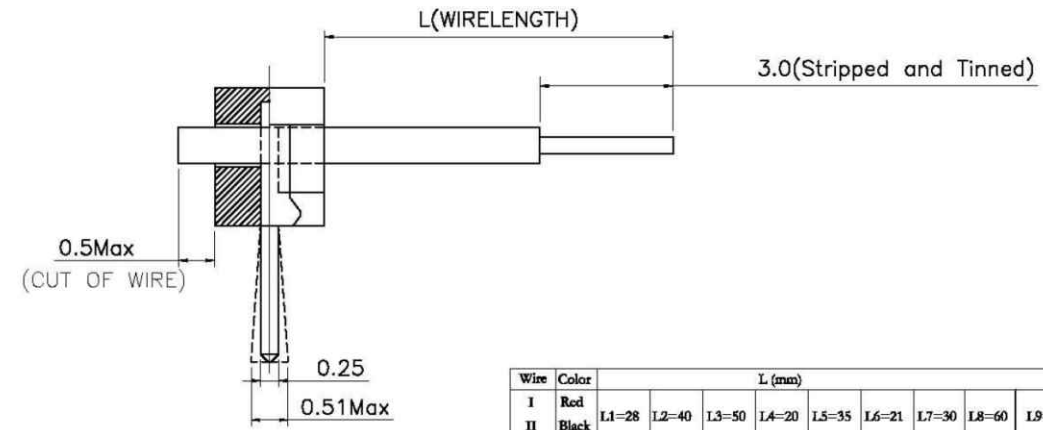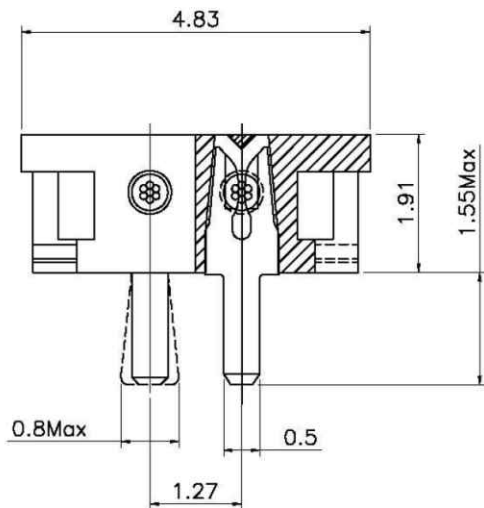

Wire	Color	L (mm)								AWG
I	Red	L1=28	L2=40	L3=50	L4=20	L5=35	L6=21	L7=30	L8=60	L9=70
II	Black									AWG #32/#30, UI Style 1571

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

VIBX-020032-M10C-LF
SERIES 10CM LEADFREE
MALE
32 AWG
02 WAY

DESCRIPTION: