
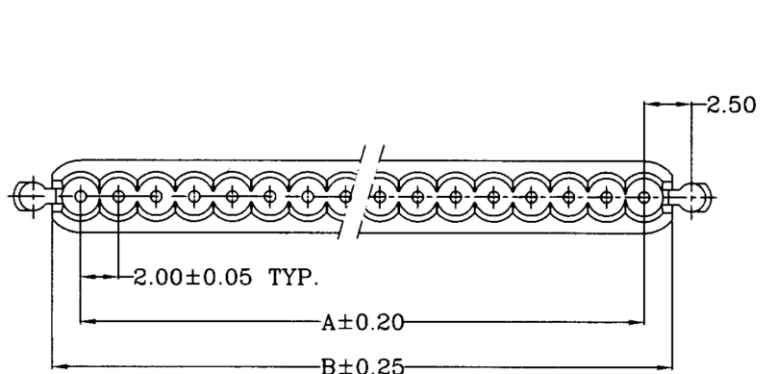


PCB LAYOUT



Material: Nylon 66 UL 94V-2
Wire range: AWG 26#
Insulation diameter: ø1.60mm Max
Strip Length: 4.50mm
Tempertature: -40°~85°C

Dimensional & Ordering Information:

Circuits	Dimensions			PCS/BAG
	A	B	C	
2	2.00	5.1	7.1	1000
3	4.00	7.1	9.1	1000
4	6.00	9.1	11.1	1000
5	8.00	11.1	13.1	1000
6	10.00	13.1	15.1	1000
7	12.00	15.1	17.1	1000
8	14.00	17.1	19.1	1000
9	16.00	19.1	21.1	1000
10	18.00	21.1	23.1	1000
11	20.00	23.1	25.1	1000
12	22.00	25.1	27.1	1000
13	24.00	27.1	29.1	1000
14	26.00	29.1	31.1	1000
15	28.00	31.1	33.1	1000
16	30.00	33.1	35.1	1000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

WH20-DB-xx-LF

SERIES

LEADFREE

02~16WAY

FLAT CABLE

DIP 180°

DESCRIPTION: