
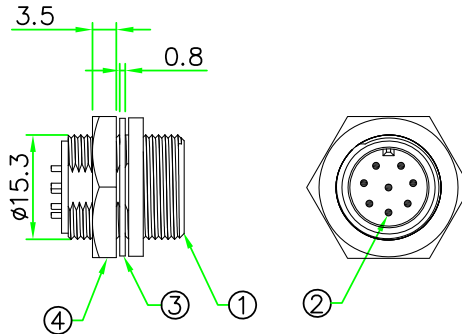




RECOMMENDED
PANEL CUT OUT

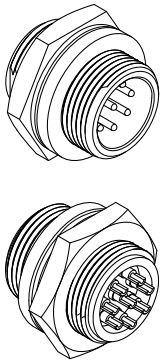

4	HEX NUT	Nylon + GF.	BLACK	1
3	GASKET	EPDM.	BLACK	1
2	CONTACT	Brass , 6 u" Gold Plated . Male Contact.	N	
1	CONNECTOR	B Size Male Connector Insert,NYLON+GF.	BLACK	1
No.	PART NAME	DESCRIPTION	COLOR	Q'TY

NOTES:


1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A /10A

CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

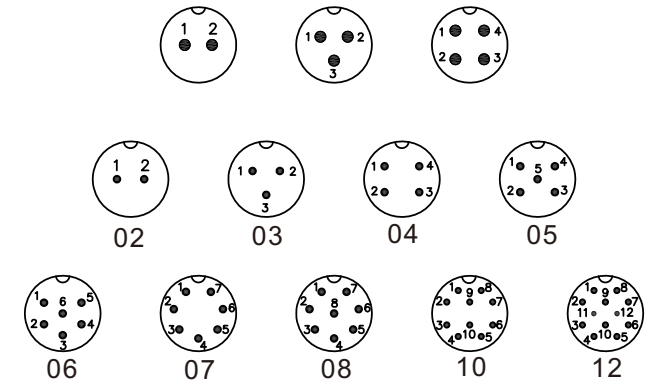

PIN ASSIGNMENT FRONT VIEW
(前視圖)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

WPC15-PSPANOBK-xxM-LF

SERIES MALE SOLDER NUT RING BLACK METKIC ON 02~12 WAY LEADFREE
PANEL FRONT

DESCRIPTION: