

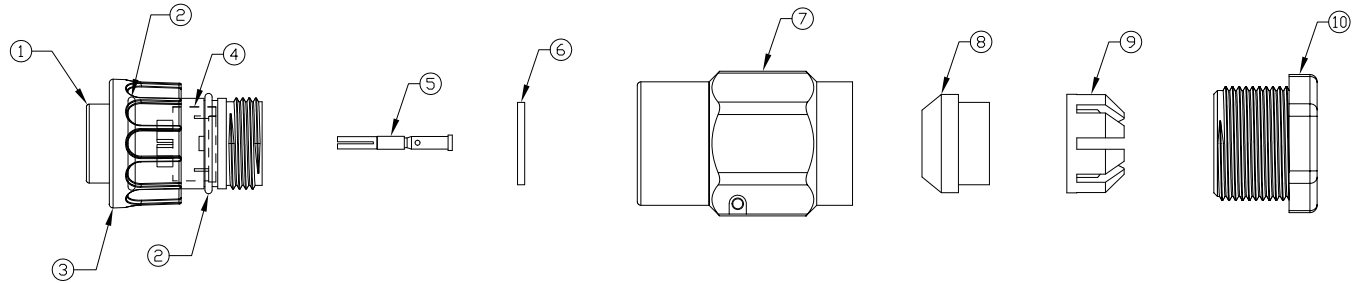


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Cover Torque: 6~7 Kgf-cm.
3. Recommend Gland Nut Torque: 9~10 Kgf-cm.
4. Cable Diameter: 5.0mm To 7.0mm.
5. RoHS Compliance.

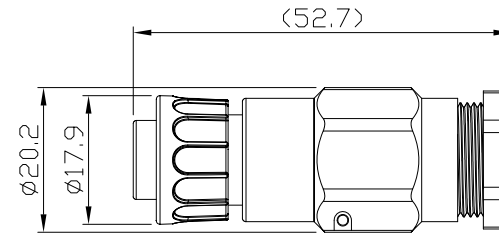

10	Gland Nut	Thermal Plastic Color: Black	1
9	Cage	Thermal Plastic Color: White	1
8	Gland	Silicone Color: Green	1
7	Cover	Thermal Plastic Color: Black	1
6	Gasket	Silicone Color: Black	1
5	Contacts	Copper Alloy Finish: Au Plated	4
4	5P Base	Thermal Plastic Color: Black	1
3	Lock Nut	Thermal Plastic Color: Black	1
2	O-ring	Silicone Color: Red	2
1	Housing	Thermal Plastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.50  
.XX ± 0.20  
.XXX ± 0.05  
ANG ± 1°

PJECTION

照片框

ORDER INFORMATION

WPC15-SABK-04N-LF

SERIES | | | | LEADFREE  
SNAP/ON  
04 WAY  
BLACK  
ASSEMBLY  
FEMALE

DESCRIPTION: C2 5A 4P Field Installable Cable End Female Crimp Lock