
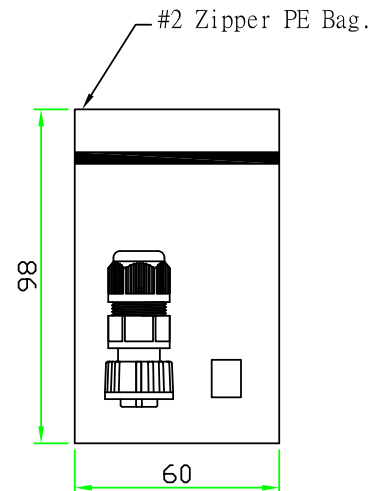
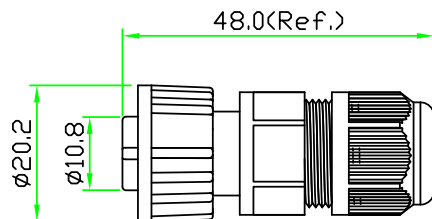




NOTES:


1. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 2A / 5A / 10A


CONNECTOR TEMPERATURE RANGE: -40°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

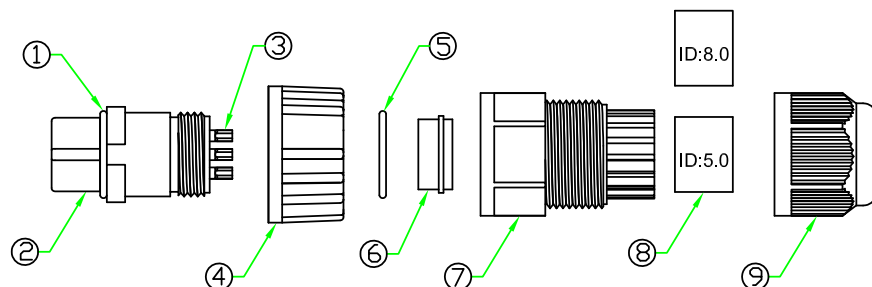

9	CLAMP NUT	NYLON+GF	BLACK	1	
8	TUBE	EPDM, (ID= 5.0 & 8.0mm.)	BLACK	2	
7	HOOD	NYLON	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	O-RING	NBR.	BLACK	1	
4	SCREW NUT	NYLON+GF	BLACK	1	
3	CONTACT	BRASS, Female Pin. 6u"Gold Plated.		N	
2	CONNECTOR	B Size Female Connector Insert, NYLON+GF.		1	
1	O-RING	VITON	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

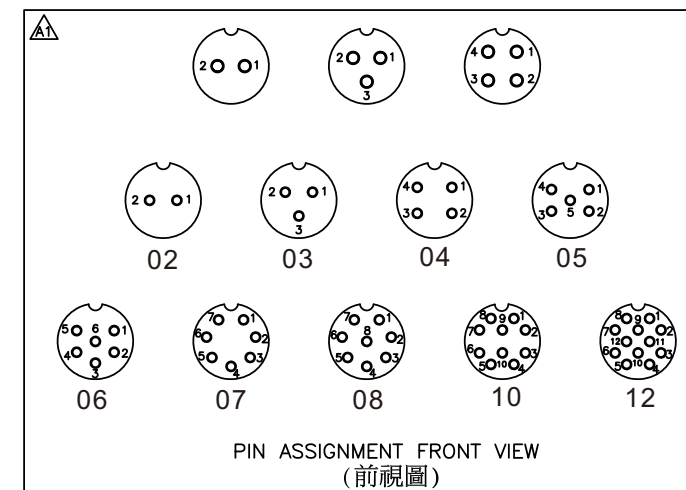

PIN ASSIGNMENT FRONT VIEW
(前視圖)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

WPC15-SABK-xxM-LF

SERIES

FEMALE

LEADFREE

METKIC ON

02~12 WAY

BLACK
ASSEMBLY

DESCRIPTION: