
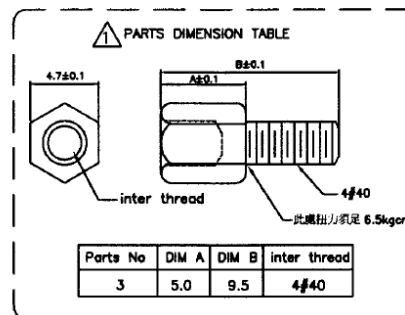


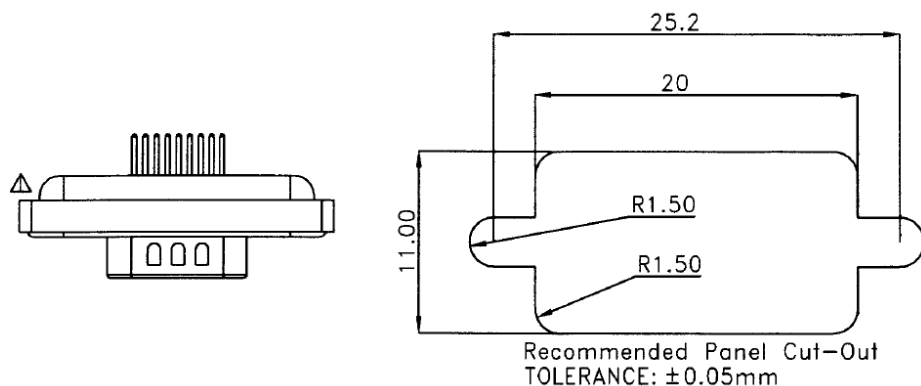

SPECIFICATION

MATERIAL

Insulator: Thermoplastic

Contacts: Copper Alloy

Shell: Steel

O-ring: Silicone

Sealant: Epoxy-Resin

Rivet: Copper Alloy

CONTACT PLATING

Underplate :50u"~150u" Nickel

Contact Area :1u"~30u" Selective Gold

Rivet :50u"~100u" Nickel

ELECTRICAL

Operation Voltage :250 VAC Max




Current Rating :3 Amps Max

Contact Resistance :15 Mohms Min 500 VDA


Dielectric Withstanding Voltage 1000 VAC/Minute

Temperature Range : -55°C TO $+105^{\circ}\text{C}$

Degree of Protection :IP67(IEC 60529)

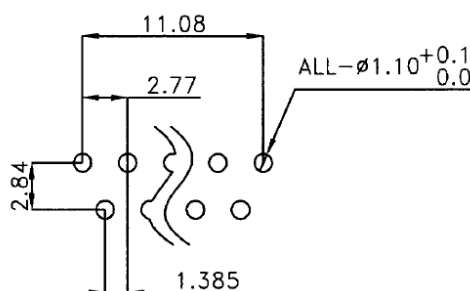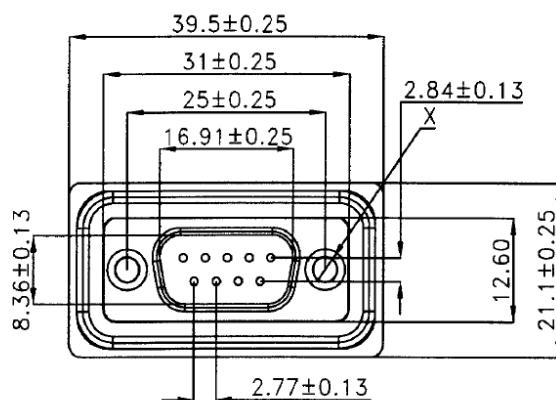

Recommended P.C.B LAYOUT
TOLERANCE : $\pm 0.05\text{mm}$

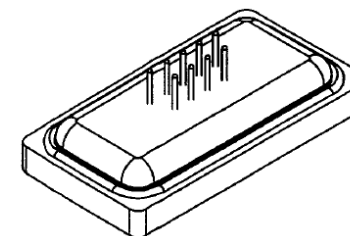

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.5

.X, ± 0.3

.XX, ± 0.2

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

WPDB-PDNH-09-LF

SERIES
LEADFREE
09 WAY
HEX SCREW
NUT
DIP180°
MALE

DESCRIPTION: WATER-PROOF D-SUB (DIP180° MALE)