
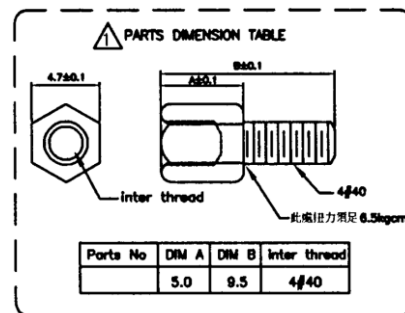
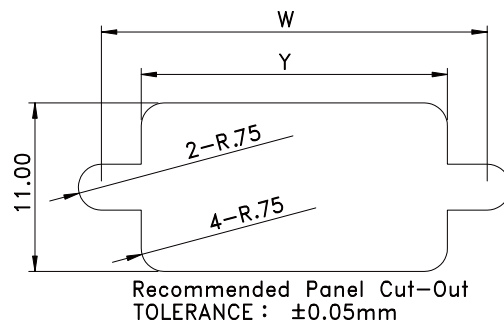


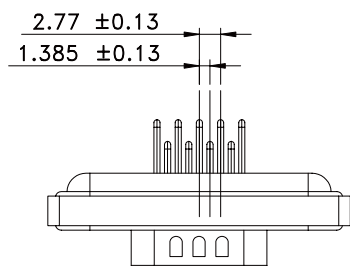

SPECIFICATION

MATERIAL





Insulator: Thermoplastic
Contacts: Copper Alloy
Shell: Steel
O-ring: Silicone
Sealant: Epoxy-Resin
Rivet: Copper Alloy

CONTACT PLATING

Underplate :50u"~150u" Nickel
Contact Area :1u"~30u" Selective Gold
Rivet :50u"~100u" Nickel

ELECTRICAL

Operation Voltage :250 VAC Max
Current Rating :3 Amps Max
Contact Resistance :15 Mohms Min 500 VDA
Dielectric Withstanding Voltage 1000 VAC/Minute
Temperature Range :-55°C TO +105°C
Degree of protction:IP67 (IEC 60529)

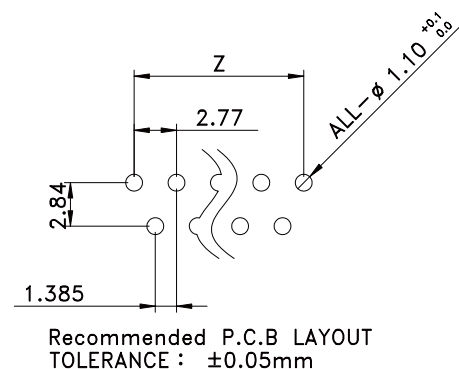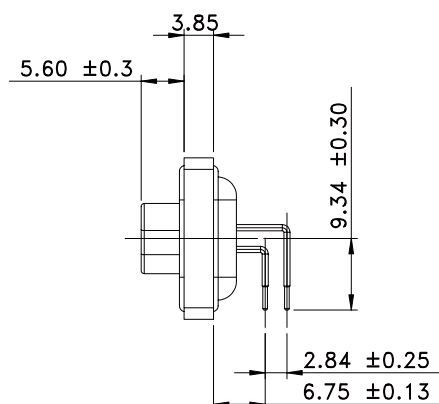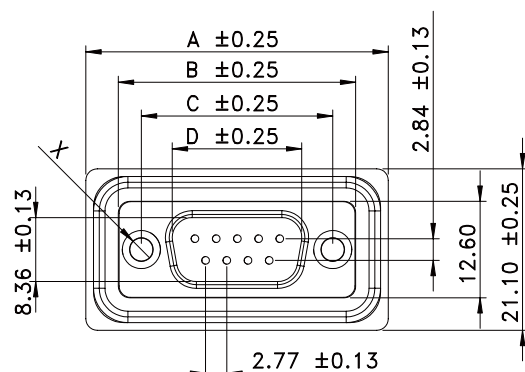

DIM FOR "X"

1=4.8mm Closed Circular Rivet(M3)

2=4.8mm Closed Circular Rivet(4#40)

PIN	A	B	C	D	W	Y	Z
9	39.50	31.00	25.00	16.91	25.20	20	11.08
15	48.00	39.30	33.32	25.25	33.50	28.30	19.39
25	61.50	53.20	47.04	38.97	47.20	42	33.24
37	77.80	69.50	63.50	55.43	63.70	58.5	49.86

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

WPDB-PRNH-xx-LF

SERIES
LEADFREE
09~37WAY
HEX SCREW
NUT
DIP90°
MALE

DESCRIPTION: WATER-PROOF D-SUB (DIP90 ° MALE)