

SPECIFICATION

MATERIAL


Insulator: Thermoplastic
 Contacts: Copper Alloy
 Shell: Steel
 O-ring: Silicone
 Sealant: Epoxy-Resin
 Rivet: Copper Alloy

CONTACT PLATING

Underplate :50u"~150u" Nickel
 Contact Area :1u"~30u" Selective Gold
 Rivet :50u"~100u" Nickel

ELECTRICAL

Operation Voltage :250 VAC Max
 Current Rating :3 Amps Max
 Contact Resistance :15 Mohms Min 500 VDA
 Dielectric Withstanding Voltage 1000 VAC/Minute
 Temperature Range : -55 °C TO +105 °C

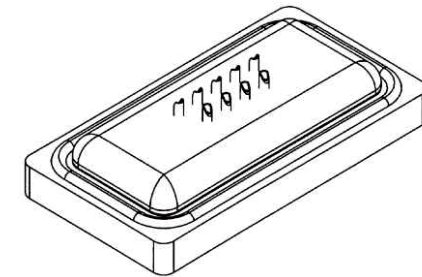

DIM FOR "X"

1=4.8mm Closed Circular Rivet(M3)

2=4.8mm Closed Circular Rivet(4#40)

PIN	A	B	C	D
9	39.50	31.00	25.00	16.90
15	48.00	39.30	33.32	25.20
25	61.50	53.20	47.04	38.90
37	77.80	69.50	63.50	55.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm SCALE 1:1

DATE

SIZE A4

PJECTION

X. \pm
 .X \pm
 .XX \pm
 .XXX \pm
 ANG \pm



ORDER INFORMATION

WPDB-PSN-xx-LF

SERIES | | | LEADFREE
 | | | 09~37WAY
 | NUT
 | SOLDER
 MALE

DESCRIPTION: