


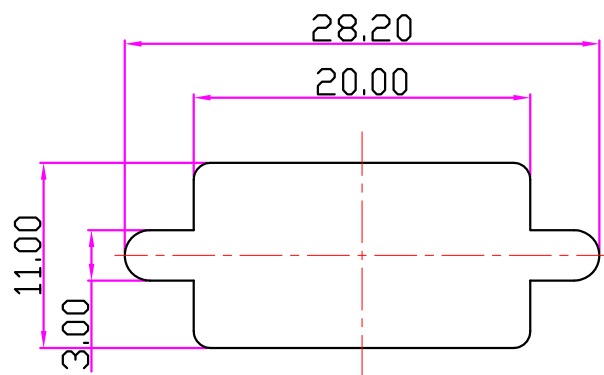





RECOMMENDED PANEL CUT-OUT

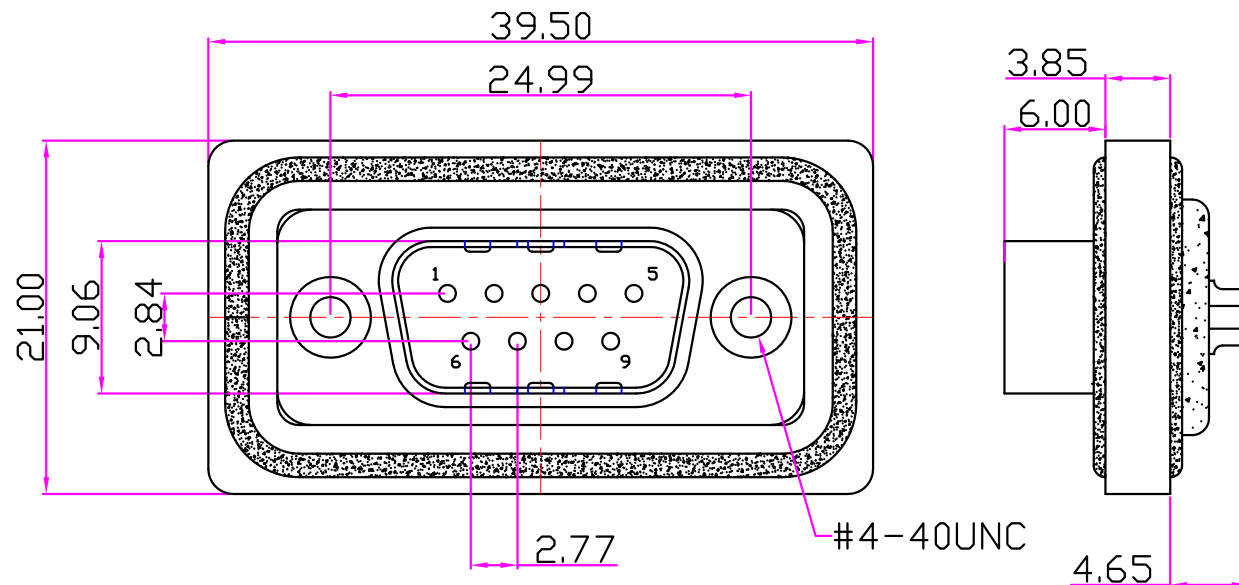

4-40 HEX JACK SCREW
FOR PANEL THICKNES S
UNDER 0.05"



4-40 HEX JACK SCREW
FOR PANEL THICKNES S
BETWEEN 0.05" AND 0.078"

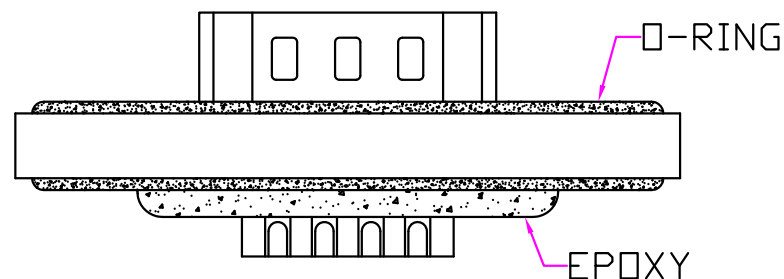

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ± 0.03
ANG ± 1°

PPOJECTION

ORDER INFORMATION

WPDB-PSNH-09-LF

SERIES
LEADFREE
09WAY
HEX SCREW
NUT
SOLDER
MALE

DESCRIPTION: 防水D-SUB 9P (M)