

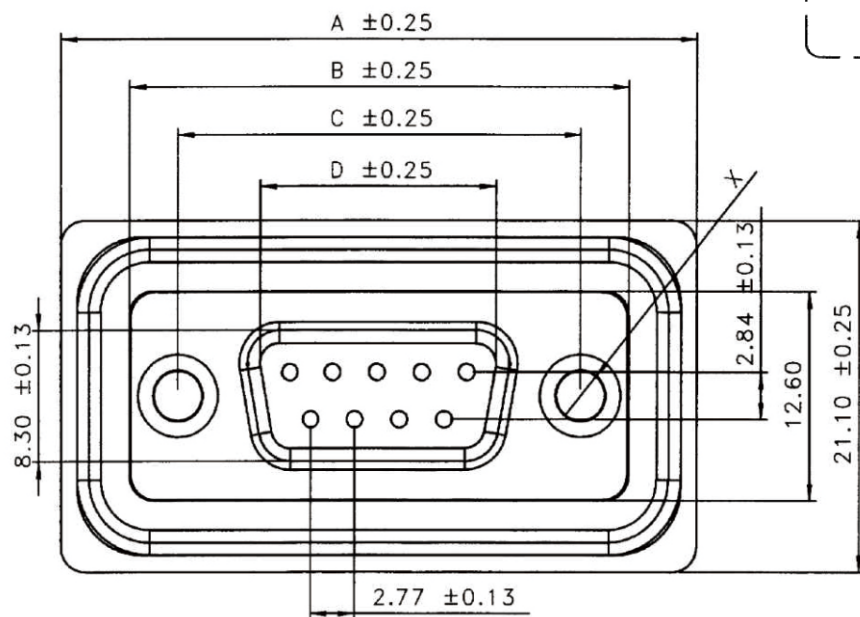
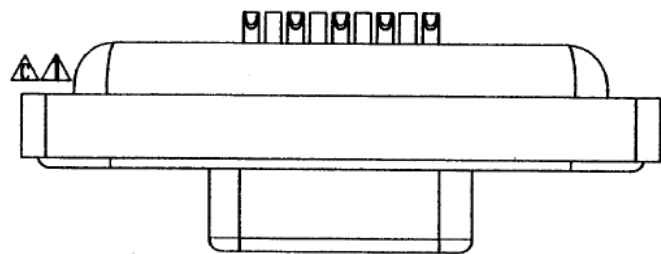


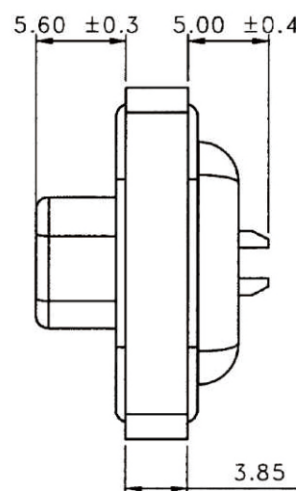

PIN	A	B	C	D
9	39.50	31.00	25.00	16.90
15	48.00	39.30	33.32	25.20
25	61.50	53.20	47.04	38.90
37	77.80	69.50	63.50	55.40

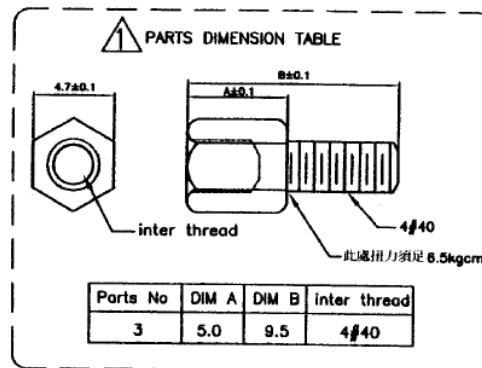

SPECIFICATION

MATERIAL

Insulator: PBT(F202G15)

Contacts: Copper Alloy

Shell: Steel

O-ring: Materials: Silicone(TOSHIBA 221-5U)

Sealant: Epoxy-Resin

Rivet: Copper Alloy

CONTACT PLATING

Underplate :50u"~150u" Nickel

Contact Area :1u"~30u" Selective Gold

Rivet :50u"~100u" Nickel

ELECTRICAL

Operation Voltage :250 VAC Max


Current Rating :3 Amps Max

Contact Resistance :15 Mohms Min 500 VDA

Dielectric Withstanding Voltage 1000 VAC/Minute

Temperature Range :-55°C TO +105°C

Degree of Protetion :IP67(IEC60529)

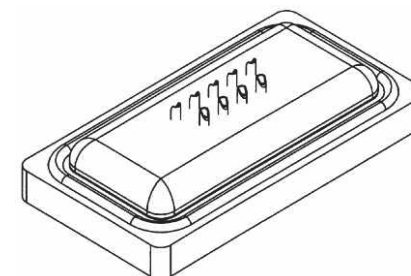

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

照片框

ORDER INFORMATION

WPDB-PSNH-xx-LF

SERIES

LEADFREE
09~37 WAY
HEX SCREW
NUT
SOLDER
MALE

DESCRIPTION: