


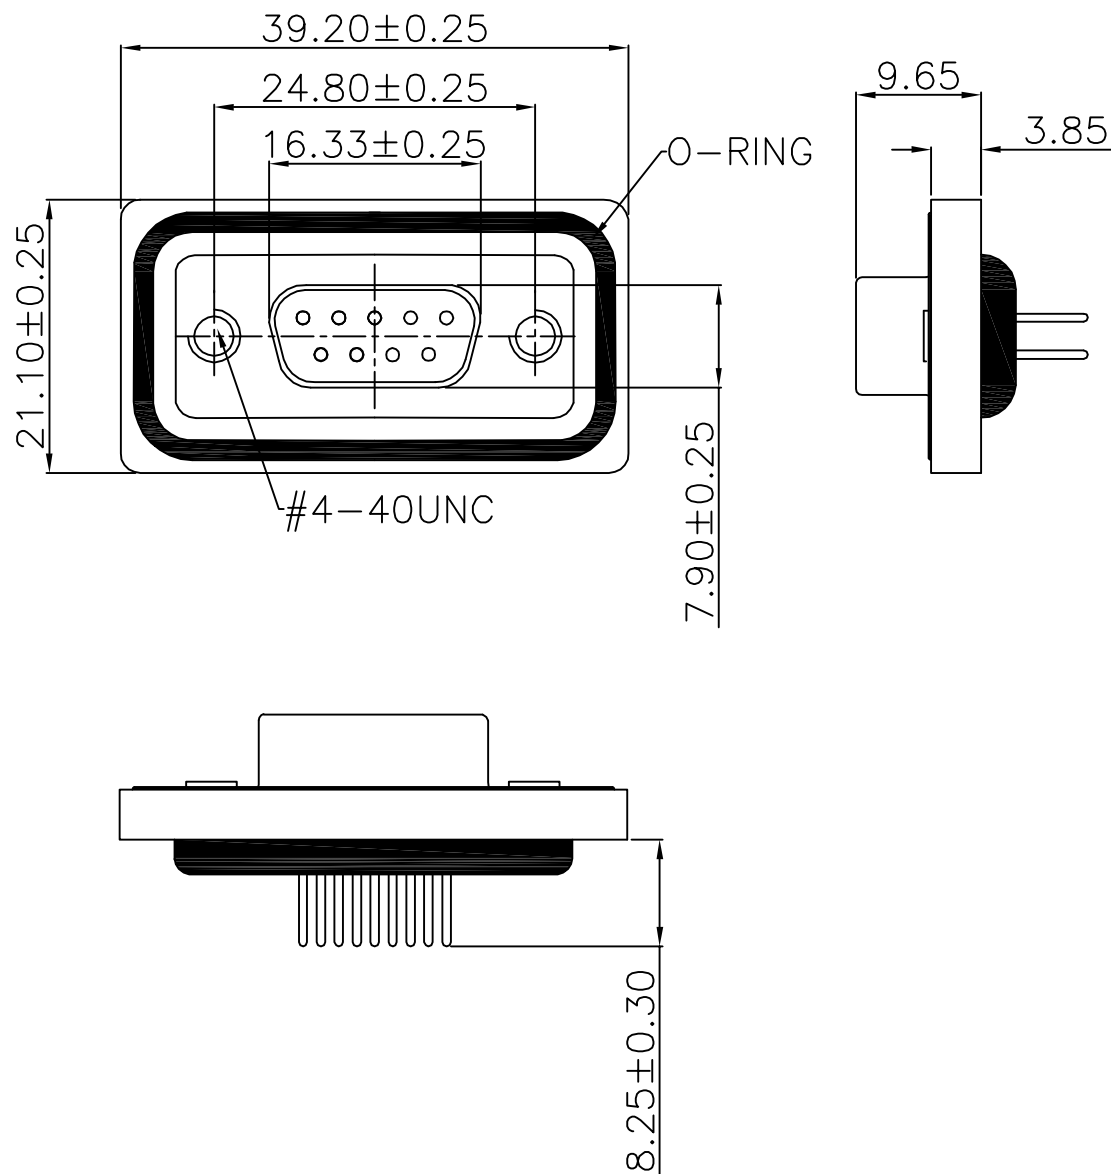

1.Materials And Finish:

Shell: Steel Material,Front Shell Tin Finished
Back Shell Tin Finished
Dimples On Plug Only

Insulator: PBT Thermoplastic,30% Glass Filled,
UL 94V-0,Black

Contact Material: Copper Alloy
Contact Finish: Full Gold Flash

2.Specification:

Contact Current Rating: 5.0 Amps

Contact Resistance: 10 Miliohms Max.

Dielectric Withstanding Voltage: 1000 V AC Min

Insulation Resistance: 5000 Megaohms Min.

Temperature Rating: -55°C~+105°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

ORDER INFORMATION

WPDB-SDN-09-LF

SERIES

LEADFREE

09 WAY

NUT

DIP180°

FEMALE

DESCRIPTION: D-SUB,180°,9 Pin ,Female,Dip