

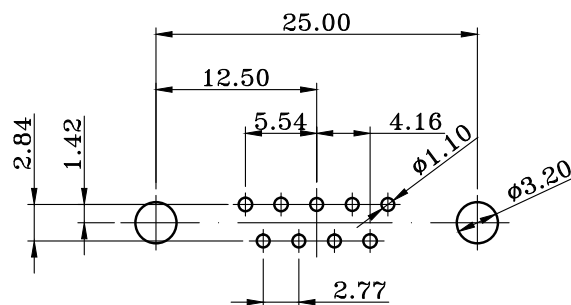
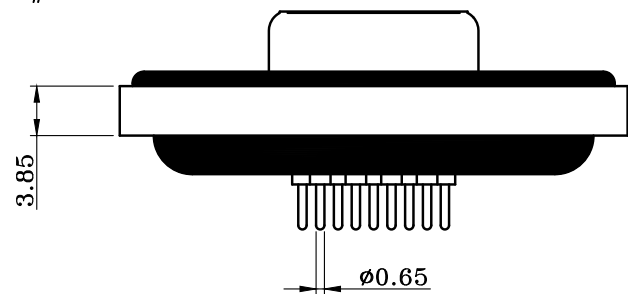
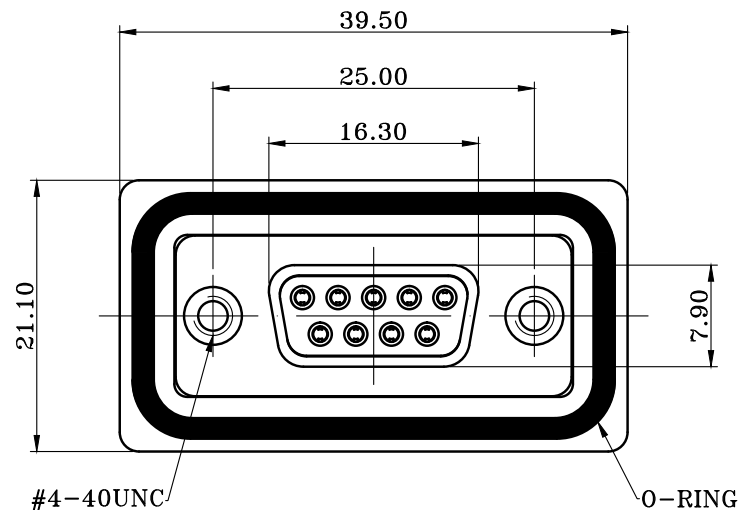


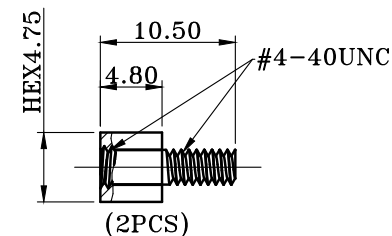

P.C.B LAYOUT

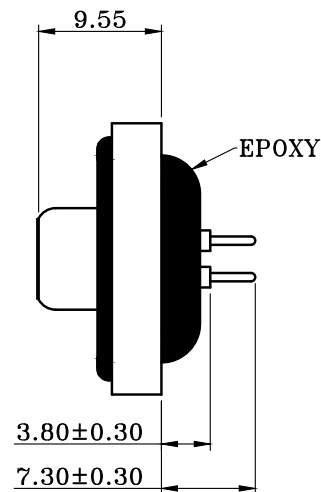

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 INSULATOR : PBT GF, UL 94V-0 , BLACK COLOR
 WATERTIGHT FRAME : PBT GF, UL 94V-0, BLACK COLOR
 O-RING : SILICONE
 SEALING COMPOUND : EPOXY
 HEXLOCKING SCREW : STAINLESS STEEL
 SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 5.0 A
 SIGNAL CONTACT RESISTANCE : 10 m Ω MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V FOR 1 MINUTE
 INSULATION RESISTANCE : 5G Ω MIN.
 TEMPERATURE RATING : -25°C ~ +85°C
 DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

WPDB-SDNH-09-LF

SERIES | | | | LEADFREE
 | | | | 09WAY
 | | | | HEX SCREW
 | | | | NUT
 | | | | DIP 180°
 | | | | FEMALE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 5^\circ$

PPOJECTION