
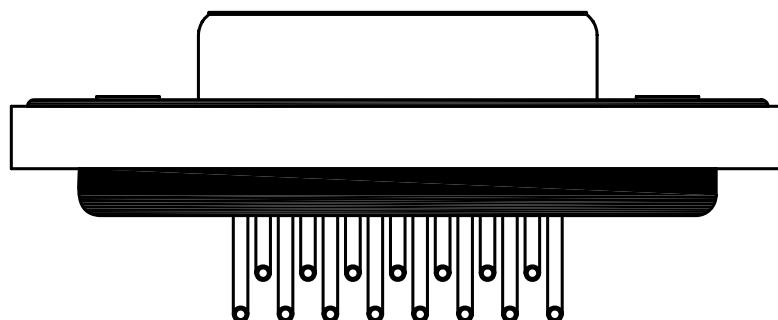
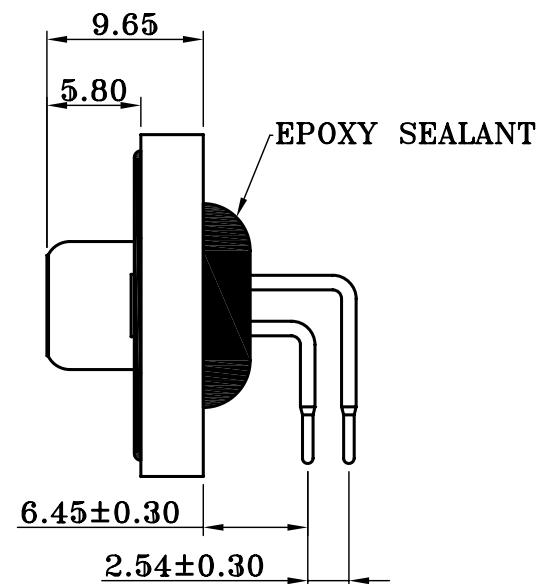


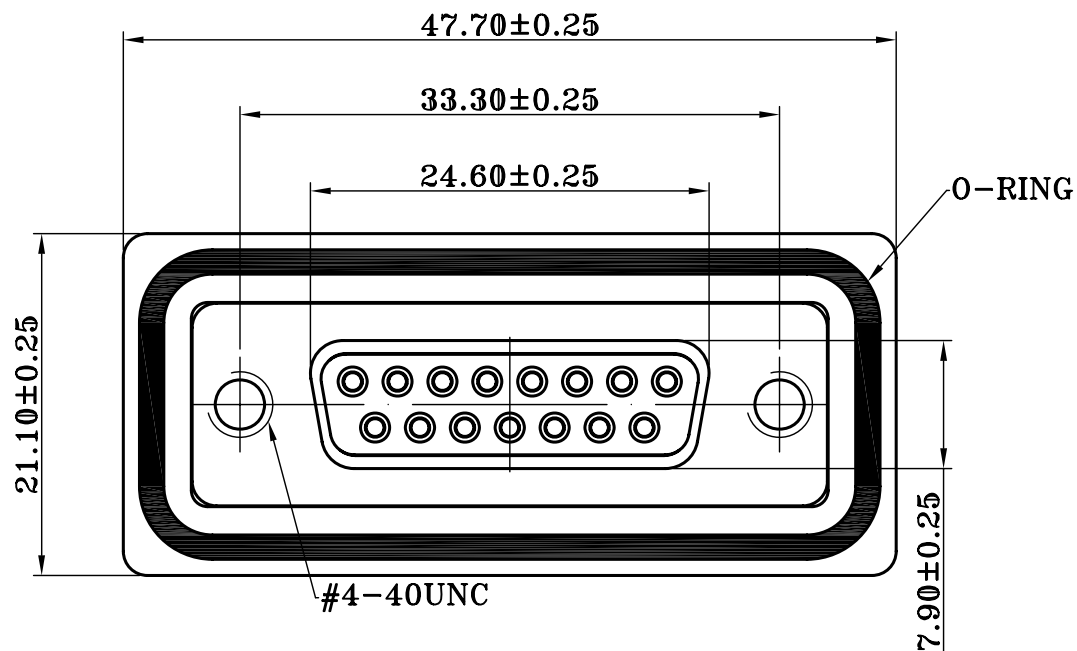

#### MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED

INSULATOR : PBT GF, UL 94V-0 , BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, GOLD FLASH

METAL WATERTIGHT FRAME : PBT GF, UL 94V-0 , BLACK COLOR

O-RING : SILICONE

EPOXY SEALANT : EPOXY

#### ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 5.0 AMPS

SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V FOR 1 MINUTE

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +105°C

DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

WPDB-SRN-15-LF

SERIES

LEADFREE

15 WAY

NUT

DIP 90°

FEMALE

DESCRIPTION: