
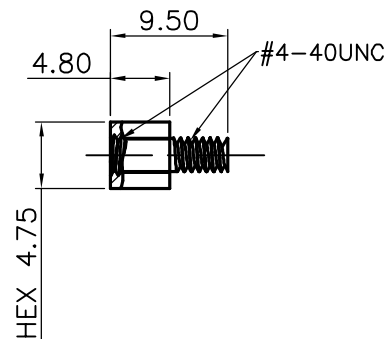
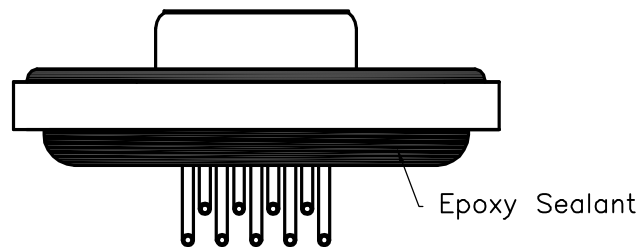
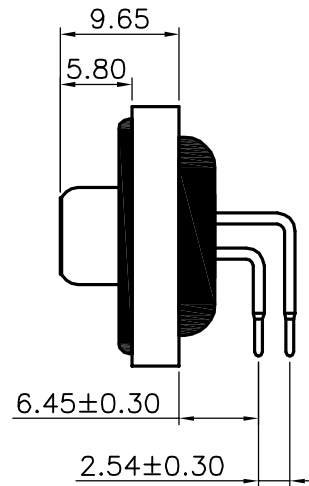


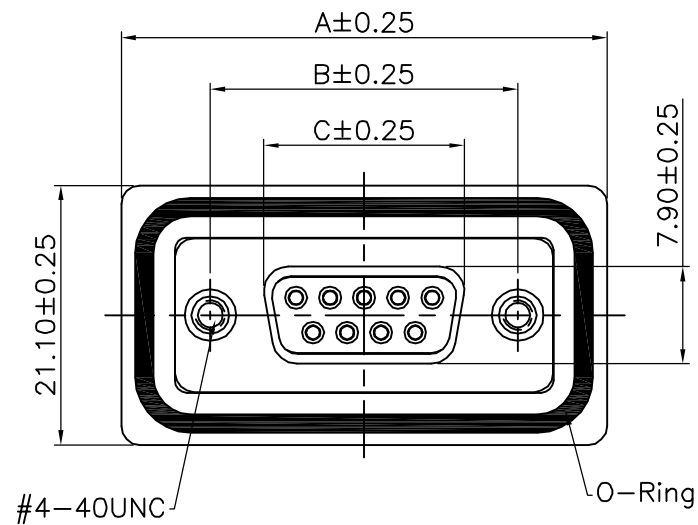

1. Materials And Finish:

Shell: Steel, Front Shell Tin Finished

Back Shell Tin Finished

Dimples On Plug Only

Insulator: PBT+30% Glass Filled, Thermoplastic, UL 94V-0, Black

Contact: Copper Alloy, Full Gold Flash

Waterproof Hood: PBT+30% Glass Filled, Thermoplast, UL94V-0, Black

Waterproof O-Ring: Silicone, Light Bule

Waterproof Epoxy: Epoxy, Black

Waterproof Screw: Copper Alloy

2. Electrical Characteristics:

Contact Current Rating: 5.0 Amps

Contact Resistance: 30 Milliohms Max.

Dielectric Withstanding Voltage: 1000V AC Min.

Insulation Resistance: 5000 Megaohms Min.

Temperature Rating: -55°C ~ +105°C

Degree Of Protection: According To IEC529-IP67

Pin No.	A	B	C
09	39.50	25.00	16.30
15	48.00	33.30	24.60
25	61.50	47.05	38.40
37	77.80	63.50	54.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

WPDB-SRHH-xx-LF

SERIES

LEADFREE

09~37WAY

HEX SCREW

NUT

DIP 90°

FEMALE

DESCRIPTION: D-SUB, Female, Machine Pin, Waterproof