


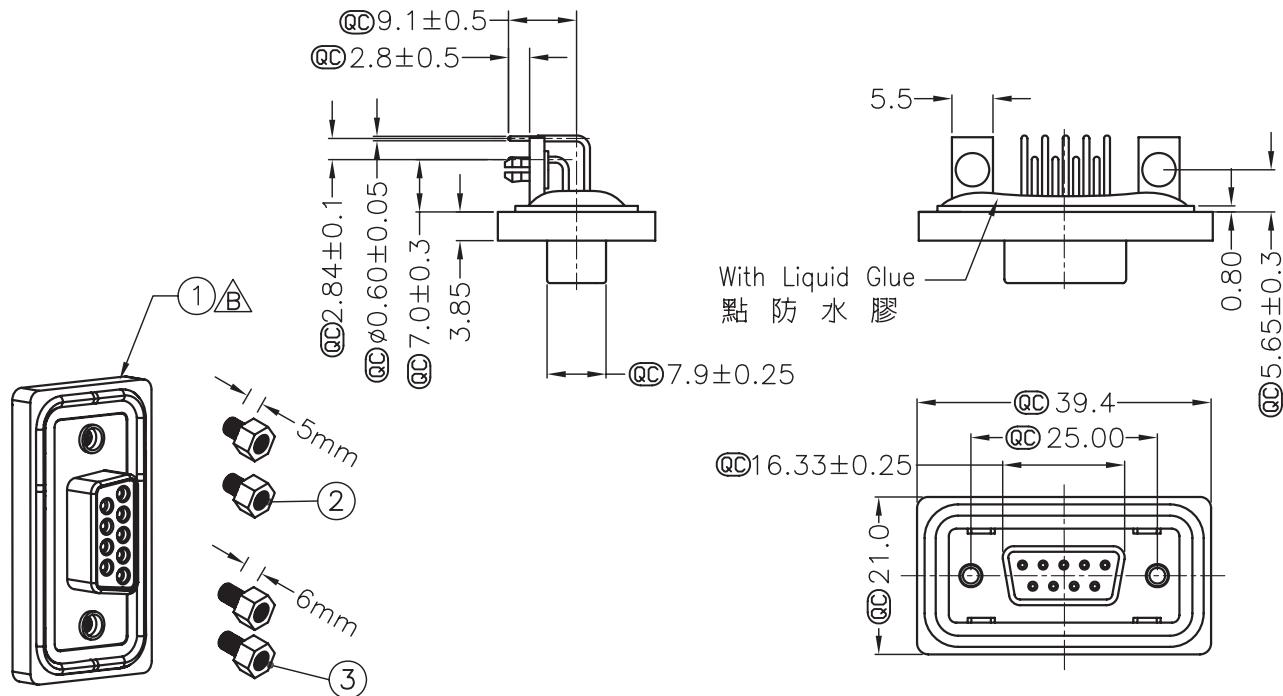

With Liquid Glue
點防水膠


Note:

- * QC Important Dimension.
- * Waterproof Rate : IP68
IP68:1M of depth of water 24 hours
(防水等級 IP68)
(IP68:1 米水深 24 小時)
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * HD-SUB Conn. :Black Core,PBT
- * Plastic Jacket : Black,Nylon+GF
- * Pin:Copper Alloy , Gold Plated
- * Ring:Light Blue,Silicone
- * Screw:Copper Alloy,Nickel Plated,#4-40 UNC
- * The 90° Board Lock Needs To Connect The Iron Shell
L 型支架需接鐵殼

Panel Thickness
面板厚度
X (MAX.)

Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚1.2mm 以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚1.2~2.0mm 以下



Recommended Panel Cut-Out
建議挖孔尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION ϕ

X, $\pm$
.X ± 0.25
.XX ± 0.10
.XXX ± 0.05
ANG $\pm 1^\circ$

照片框

ORDER INFORMATION

WPDB-SRZNH-09-LF



DESCRIPTION: DB9/F Conn,Panel,PCB 90° Add Board Lock